

# Memory and data locality

## CHAPTER OUTLINE

4.1 Importance of Memory Access Efficiency.....	72
4.2 Matrix Multiplication.....	73
4.3 CUDA Memory Types .....	77
4.4 Tiling for Reduced Memory Traffic.....	84
4.5 A Tiled Matrix Multiplication Kernel.....	90
4.6 Boundary Checks .....	94
4.7 Memory as a Limiting Factor to Parallelism .....	97
4.8 Summary.....	99
4.9 Exercises.....	100

So far, we have learned how to write a CUDA kernel function and how to configure and coordinate its execution by a massive number of threads. In this chapter, we will study how one can organize and position the data for efficient access by a massive number of threads. We discussed in [Chapter 2](#), Data parallel computing that the data are first transferred from the host memory to the device global memory. In [Chapter 3](#), Scalable parallel execution we determined how to direct the threads to access their portions of the data from the global memory by using their block indexes and thread indexes. We have also explored resource assignment and thread scheduling. Although the scope we have covered is a very good start, the CUDA kernels that we have learned thus far will likely achieve only a tiny fraction of the potential speed of the underlying hardware. The poor performance is attributable to the long access latencies (hundreds of clock cycles) and finite access bandwidth of global memory, which is typically implemented with Dynamic Random Access Memory. While having numerous threads available for execution can theoretically tolerate long memory access latencies, one can easily run into a situation where traffic congestion in the global memory access paths prevents all but very few threads from making progress, thus rendering some of the Streaming Multiprocessors (SMs) idle. To circumvent such congestion, CUDA provides a number of additional resources and methods for accessing memory that can remove the majority of traffic to and from the global memory. In this chapter, you will learn to use different memory types to boost the execution efficiency of CUDA kernels.

## 4.1 IMPORTANCE OF MEMORY ACCESS EFFICIENCY

We can illustrate the effect of memory access efficiency by calculating the expected performance level of the most executed portion of the image blur kernel code in Fig. 3.8, which is replicated in Fig. 4.1. The most important part of the kernel in terms of execution time is the nested `for`-loop that performs pixel value accumulation with the blurring patch.

In every iteration of the inner loop, one global memory access is performed for one floating-point addition. The global memory access fetches an `in[]` array element. The floating-point add operation accumulates the value of the `in[]` array element into `pixVal`. Thus, the ratio of floating-point calculation to global memory access operation is 1 to 1, or 1.0. We will refer to this ratio as the *compute-to-global-memory-access ratio*, defined as the number of floating-point calculation performed for each access to the global memory within a region of a program.

The compute-to-global-memory-access ratio has major implications on the performance of a CUDA kernel. In a high-end device today, the global memory bandwidth is around 1,000 GB/s, or 1 TB/s. With four bytes in each single-precision floating-point value, no more than  $1000/4 = 250$  giga single-precision operands per second can be expected to load. With a compute-to-global-memory ratio of 1.0, the execution of the image blur kernel will be limited by the rate at which the operands (e.g., the elements of `in[]`) can be delivered to the GPU. We will refer to programs whose execution speed is limited by memory access throughput as *memory-bound* programs. In our example, the kernel will achieve no more than 250 giga floating-point operations per second (GFLOPS).

While 250 GFLOPS is a respectable number, it is only a tiny fraction (2%) of the peak single-precision performance of 12 TFLOPS or higher for these high-end devices. In order to achieve a higher level of performance for the kernel, we need to increase the ratio by reducing the number of global memory accesses. To achieve the peak 12 TFLOPS rating of the processor, we need a ratio of 48 or higher. In general, the desired ratio has been increasing in the past few generations of devices as

```

4.     for(int blurRow = -BLUR_SIZE; blurRow < BLUR_SIZE+1; ++blurRow) {
5.         for(int blurCol = -BLUR_SIZE; blurCol < BLUR_SIZE+1; ++blurCol) {
6.             int curRow = Row + blurRow;
7.             int curCol = Col + blurCol;
8.             // Verify we have a valid image pixel
9.             if(curRow > -1 && curRow < h && curCol > -1 && curCol < w) {
10.                pixVal += in[curRow * w + curCol];
11.                pixels++; // Keep track of number of pixels in the avg
12.            }
13.        }
14.    }

```

FIGURE 4.1

The most executed part of the image blurring kernel in Fig. 3.8.

computational throughput has been increasing faster than memory bandwidth. The rest of this chapter introduces a commonly used technique for reducing the number of global memory accesses.

## 4.2 MATRIX MULTIPLICATION

Matrix–matrix multiplication, or matrix multiplication for short, between an  $i \times j$  ( $i$  rows by  $j$  columns) matrix  $M$  and a  $j \times k$  matrix  $N$  produces an  $i \times k$  matrix  $P$ . Matrix multiplication is an important component of the Basic Linear Algebra Subprograms (BLAS) standard (see the “Linear Algebra Functions” sidebar in Chapter 3: Scalable Parallel Execution). This function is the basis of many linear algebra solvers such as LU decomposition. As we will see, matrix multiplication presents opportunities for reduction of global memory accesses that can be captured with relatively simple techniques. The execution speed of matrix multiplication functions can vary by orders of magnitude, depending on the level of reduction of global memory accesses. Therefore, matrix multiplication provides an excellent initial example for such techniques.

When performing a matrix multiplication, each element of the output matrix  $P$  is an inner product of a row of  $M$  and a column of  $N$ . We will continue to use the convention where  $P_{\text{Row},\text{Col}}$  is the element at  $\text{Row}^{\text{th}}$  position in the vertical direction and  $\text{Col}^{\text{th}}$  position in the horizontal direction. As shown in Fig. 4.2,  $P_{\text{Row},\text{Col}}$  (the small square in  $P$ ) is the inner product of the vector formed from the  $\text{Row}^{\text{th}}$  row of  $M$  (shown as a horizontal strip in  $M$ ) and the vector formed from the  $\text{Col}^{\text{th}}$  column of  $N$  (shown as a vertical strip in  $N$ ). The inner product, also called the dot product, of two vectors is the sum of products of the individual vector elements, i.e.,  $P_{\text{Row},\text{Col}} = \sum M_{\text{Row},k} * N_{k,\text{Col}}$ , for  $k = 0, 1, \dots, \text{Width} - 1$ . For instance,

$$P_{1,5} = M_{1,0} * N_{0,5} + M_{1,1} * N_{1,5} + M_{1,2} * N_{2,5} + \dots + M_{1,\text{Width}-1} * N_{\text{Width}-1,5}$$

In our initial matrix multiplication implementation, we map threads to elements of  $P$  with the same approach that we used for `colorToGreyscaleConversion`; i.e., each thread is responsible for calculating one  $P$  element. The row and column indexes for the  $P$  element to be calculated by each thread are as follows:

```
Row=blockIdx.y*blockDim.y+threadIdx.y
and
Col=blockIdx.x*blockDim.x+threadIdx.x.
```

With this one-to-one mapping, the `Row` and `Col` thread indexes are also the row and column indexes for output array. Fig. 4.3 shows the source code of the kernel based on this thread-to-data mapping. The reader should immediately see the familiar pattern of calculating `Row`, `Col` and the if statement testing if both `Row` and `Col` are within range. These statements are almost identical to their counterparts in `colorToGreyscaleConversion`. The only significant difference is that we are assuming square matrices for `matrixMulKernel`, thus replacing both `width` and `height` with `Width`.

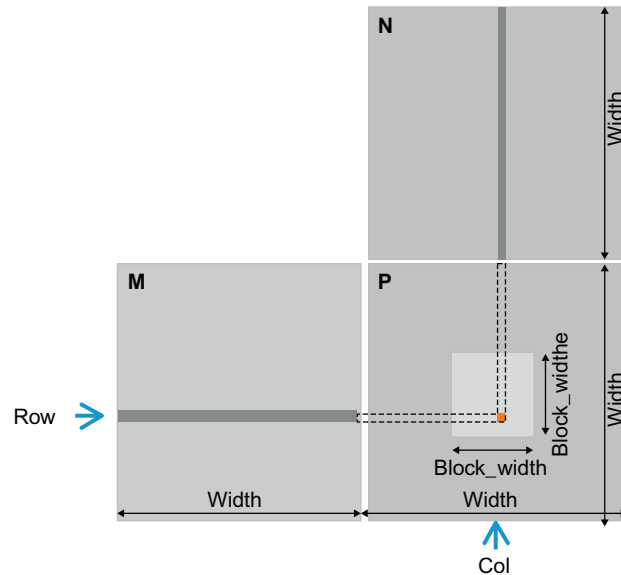


FIGURE 4.2

Matrix multiplication using multiple blocks by tiling  $P$ .

The thread-to-data mapping effectively divides  $P$  into tiles, one of which is shown as a large square in Fig. 4.2. Each block is responsible for calculating one of these tiles.

We now turn our attention to the work done by each thread. Recall that  $P_{Row, Col}$  is the inner product of the  $Row^{th}$  row of  $M$  and the  $Col^{th}$  column of  $N$ . In Fig. 4.3, we use a `for`-loop to perform this inner product operation. Before entering the loop, we initialize a local variable `Pvalue` to 0. Each iteration of the loop accesses an element from the  $Row^{th}$  row of  $M$  and one from the  $Col^{th}$  column of  $N$ , multiplies the two elements together, and accumulates the product into `Pvalue`.

First, we focus on accessing the  $M$  element within the `for`-loop. Recall that  $M$  is linearized into an equivalent 1D array where the rows of  $M$  are placed one after another in the memory space, starting with the  $0^{th}$  row. Therefore, the beginning element of the 1st row is  $M[1 * Width]$  because we need to account for all elements of the  $0^{th}$  row. In general, the beginning element of the  $Row^{th}$  row is  $M[Row * Width]$ . Since all elements of a row is placed in consecutive locations, the  $k^{th}$  element of the  $Row^{th}$  row is at  $M[Row * Width + k]$ . This method was applied in Fig. 4.3.

We now turn our attention to  $N$ . As shown in Fig. 4.3, the beginning element of the  $Col^{th}$  column is the  $Col^{th}$  element of the  $0^{th}$  row, which is  $N[Col]$ . Accessing each additional element in  $Col^{th}$  column requires skipping over entire rows. The reason is that the next element of the same column is actually the same element in the next row. Therefore, the  $k^{th}$  element of the  $Col^{th}$  column is  $N[k * Width + Col]$ .

```

__global__ void MatrixMulKernel(float* M, float* N, float* P,
int Width) {
// Calculate the row index of the P element and M
int Row = blockIdx.y*blockDim.y+threadIdx.y;
// Calculate the column index of P and N
int Col = blockIdx.x*blockDim.x+threadIdx.x;
if ((Row < Width) && (Col < Width)) {
float Pvalue = 0;
// each thread computes one element of the block sub-matrix
for (int k = 0; k < Width; ++k) {
Pvalue += M[Row*Width+k]*N[k*Width+Col];
}
P[Row*Width+Col] = Pvalue;
}
}

```

**FIGURE 4.3**

A simple matrix multiplication kernel using one thread to compute one P element.


After the execution exits the `for`-loop, all threads have their P element values in the `Pvalue` variables. Each thread then uses the one-dimensional equivalent index expression `Row*Width+Col` to write its P element. Again, this index pattern is similar to that used in the `colorToGreyscaleConversion` kernel.

We now use a small example to illustrate the execution of the matrix multiplication kernel. [Fig. 4.4](#) shows a  $4 \times 4$  P with `BLOCK_WIDTH=2`. The small sizes allow us to fit the entire example in one picture. The P matrix is now divided into four tiles, and each block calculates one tile. We do so by creating blocks that are  $2 \times 2$  arrays of threads, with each thread calculating one P element. In the example, `thread(0,0)` of `block(0,0)` calculates  $P_{0,0}$ , whereas `thread(0,0)` of `block(1,0)` calculates  $P_{2,0}$ .


`Row` and `Col` in the `matrixMulKernel` identify the P element to be calculated by a thread. `Row` also identifies the row of M, whereas `Col` identifies the column of N as input values for the thread. [Fig. 4.5](#) illustrates the multiplication operations in each thread block. For the small matrix multiplication example, threads in `block(0,0)` produce four dot products. The `Row` and `Col` variables of `thread(1,0)` in `block(0,0)` are  $0*0 + 1 = 1$  and  $0*0 + 0 = 0$ . It maps to  $P_{1,0}$  and calculates the dot product of row 1 of M and column 0 of N.

We walk through the execution of the `for`-loop in [Fig. 4.3](#) for `thread(0,0)` in `block(0,0)`. During the 0<sup>th</sup> iteration ( $k=0$ ), `Row*Width+k=0*4 + 0 = 0` and `k*Width+Col=0*4 + 0=0`. Therefore, we are accessing `M[0]` and `N[0]`, which are the 1D equivalent of  $M_{0,0}$  and  $N_{0,0}$ , according to [Fig. 3.3](#). Note that these are indeed the 0<sup>th</sup> elements of row 0 of M and column 0 of N. During the 1st iteration ( $k=1$ ), `Row*Width+k=0*4+1=1` and `k*Width+Col=1*4+0=4`. We are accessing `M[1]` and `N[4]`, which are the 1D equivalent of  $M_{0,1}$  and  $N_{1,0}$ , according to [Fig. 3.3](#). These are the 1st elements of row 0 of M and column 0 of N.

During the 2nd iteration ( $k=2$ ), `Row*Width+k=0*4+2=2` and `k*Width+Col=8`, which results in `M[2]` and `N[8]`. Therefore, the elements accessed are the 1D equivalent of  $M_{0,2}$  and  $N_{2,0}$ . Finally, during the 3rd iteration ( $k=3$ ), `Row*Width+k=0*4+3` and

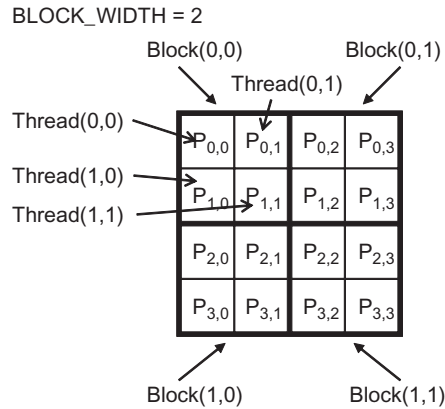

**FIGURE 4.4**  
A small execution example of matrixMulKernel.

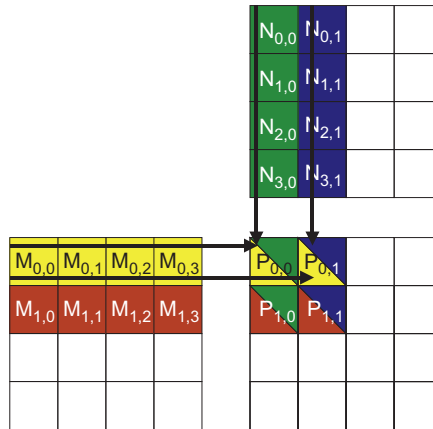

**FIGURE 4.5**  
Matrix multiplication actions of one thread block.

$k \cdot \text{Width} + \text{Col} = 12$ , which results in  $M[3]$  and  $N[12]$ , the 1D equivalent of  $M_{0,3}$  and  $N_{3,0}$ . We now have verified that the `for`-loop performs inner product between the 0<sup>th</sup> row of  $M$  and the 0<sup>th</sup> column of  $N$ . After the loop, the thread writes  $P[\text{Row} \cdot \text{Width} + \text{Col}]$ , which is  $P[0]$ , the 1D equivalent of  $P_{0,0}$ . Thus, `thread(0,0)` in `block(0,0)` successfully calculated the inner product between the 0<sup>th</sup> row of  $M$  and the 0<sup>th</sup> column of  $N$  and deposited the result in  $P_{0,0}$ .

We will leave it as an exercise for the reader to hand-execute and verify the `for`-loop for other threads in `block(0,0)` or in other blocks.

Note that `matrixMulKernel` can handle matrices of up to  $16 \times 65,535$  elements in each dimension. In a situation where matrices larger than this limit are to be multiplied, one can divide the `P` matrix into submatrices with sizes that can be covered by a grid. We can then use the host code to iteratively launch kernels and complete the `P` matrix. Alternatively, we can change the kernel code so that each thread calculates more `P` elements.

We can estimate the effect of memory access efficiency by calculating the expected performance level of the matrix multiplication kernel code in Fig. 4.3. The dominating part of the kernel in terms of execution time is the for-loop that performs inner product calculation:

```
for(int k = 0;k < Width;++k)Pvalue +
    = M[Row * Width + k] * N[k * Width + Col];
```

In every iteration of this loop, two global memory accesses are performed for one floating-point multiplication and one floating-point addition. One global memory access fetches an `M` element, and the other fetches an `N` element. One floating-point operation multiplies the `M` and `N` elements fetched, and the other accumulates the product into `Pvalue`. Thus, the compute-to-global-memory-access ratio of the loop is 1.0. From our discussion in Chapter 3, Scalable parallel execution, this ratio will likely result in less than 2% utilization of the peak execution speed of the modern GPUs. We need to increase the ratio by at least an order of magnitude for the computation throughput of modern devices to achieve good utilization. In the next section, we will show that we can use special memory types in CUDA devices to accomplish this goal.

---

## 4.3 CUDA MEMORY TYPES

A CUDA device contains several types of memory that can help programmers improve compute-to-global-memory-access ratio and thus achieve high execution speed. Fig. 4.6 shows these CUDA device memories. Global memory and constant memory appear at the bottom of the picture. These types of memory can be written (W) and read (R) by the host by calling API functions.<sup>1</sup> We have already introduced global memory in Chapter 2, Data parallel computing. The global memory can be written and read by the device. The constant memory supports short-latency, high-bandwidth *read-only access* by the device.

Registers and shared memory, as shown in Fig. 4.6, are on-chip memories. Variables that reside in these types of memory can be accessed at very high-speed in a highly parallel manner. Registers are allocated to individual threads; each thread can only access its own registers. A kernel function typically uses registers to hold frequently accessed variables that are private to each thread. Shared memory locations are allocated to thread blocks; all threads in a block can access shared memory variables allocated to the block. Shared memory is an efficient means for threads to

---


<sup>1</sup>See CUDA Programming Guide for zero-copy access to the global memory.

Device code can:

- R/W per-thread registers
- R/W per-thread local memory
- R/W per-block shared memory
- R/W per-grid global memory
- Read only per-grid constant memory

Host code can

- Transfer data to/from per grid global and constant memories

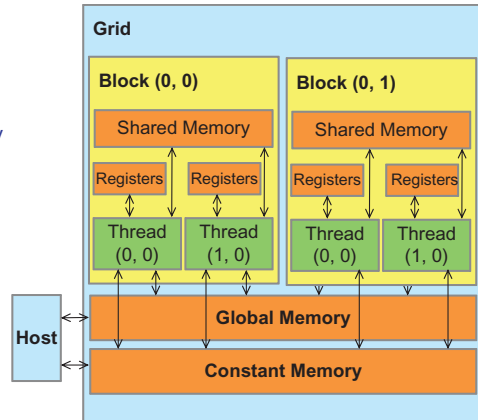

**FIGURE 4.6**

Overview of the CUDA device memory model.

cooperate by sharing their input data and intermediate results. By declaring a CUDA variable in one of the CUDA memory types, a CUDA programmer dictates the visibility and access speed of the variable.


In order to fully appreciate the difference between registers, shared memory, and global memory, we need to go into a little more detail of how these different memory types are realized and used in modern processors. Virtually all modern processors find their root in the model proposed by John von Neumann in 1945, which is shown in Fig. 4.7. The CUDA devices are no exception. The Global Memory in a CUDA device maps to the Memory box in Fig. 4.7. The processor box corresponds to the processor chip boundary that we typically see today. The Global Memory is off the processor chip and is implemented with DRAM technology, which implies long access latencies and relatively low access bandwidths. The Registers correspond to the Register File of the von Neumann model. The Register File is on the processor chip, which implies very short access latency and drastically higher access bandwidth compared with the global memory. In a typical device, the aggregated access bandwidth of the register files is at least two orders of magnitude higher than that of the global memory. Furthermore, when a variable is stored in a register, its accesses no longer consume off-chip global memory bandwidth. This reduced bandwidth consumption will be reflected as an increased compute-to-global-memory-access ratio.

A subtler point is that each access to registers involves fewer instructions than an access to the global memory. Arithmetic instructions in most modern processors have “built-in” register operands. For example, a floating-point addition instruction might be of the form

```
fadd r1, r2, r3
```

where *r2* and *r3* are the register numbers that specify the location in the register file where the input operand values can be found. The location for storing the



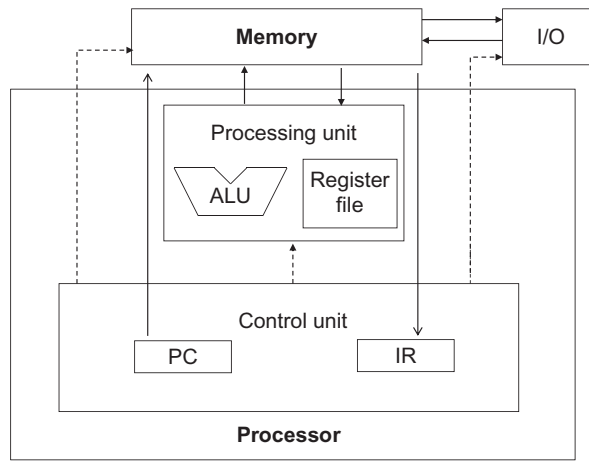

**FIGURE 4.7**

Memory vs. registers in a modern computer based on the von Neumann model.

floating-point addition result value is specified by r1. Therefore, when an operand of an arithmetic instruction is in a register, no additional instruction is required to make the operand value available to the arithmetic and logic unit (ALU), where the arithmetic calculation is performed.

### THE VON NEUMANN MODEL

In his seminal 1945 report, John von Neumann described a model for building electronic computers, which is based on the design of the pioneering Electronic Discrete Variable Automatic Computer (EDVAC) computer. This model, now commonly referred to as the von Neumann Model, has been the foundational blueprint for virtually all modern computers.

The von Neumann Model is illustrated in [Fig. 4.7](#). The computer has an input/output function that allows both programs and data to be provided to and generated from the system. To execute a program, the computer first inputs the program and its data into the Memory.

The program consists of a collection of instructions. The Control Unit maintains a Program Counter (PC), which contains the memory address of the next instruction to be executed. In each “instruction cycle,” the Control Unit uses the PC to fetch an instruction into the Instruction Register (IR). The instruction bits are then used to determine the action to be taken by all components of the computer, which is why the model is also called the “stored program” model. The term implies that a user can change the behavior of a computer by storing a different program into its memory.


Meanwhile, if an operand value is in the global memory, the processor needs to perform a memory load operation to make the operand value available to the ALU. For example, if the first operand of a floating-point addition instruction is in the global memory, the instructions involved will likely be

```
load r2, r4, offset
fadd r1, r2, r3
```

where the load instruction adds an offset value to the contents of r4 to form an address for the operand value. It then accesses the global memory and places the value into register r2. Once the operand value is in r2, the fadd instruction performs the floating-point addition by using the values in r2 and r3 and then places the result into r1. Since the processor can only fetch and execute a limited number of instructions per clock cycle, the version with an additional load will likely take more time to process than the one without an additional load. Thus, placing the operands in registers can improve execution speed.

Finally, there is another subtle reason why placing an operand value in registers is preferable. In modern computers, the energy consumed for accessing a value from the register file is at least an order of magnitude lower than that for accessing a value from the global memory. We will examine the speed and energy difference in accessing these two hardware structures in modern computers. However, as we will soon learn, the number of registers available to each thread (see “Processing Units and Threads” sidebar) is quite limited in today’s GPUs. We need to be careful not to oversubscribe to this limited resource.

Fig. 4.8 shows the shared memory and registers in a CUDA device. Although both are on-chip memories, they differ significantly in functionality and cost of access. Shared memory is designed as part of the memory space that resides on the processor chip. When the processor accesses data that reside in the shared memory,

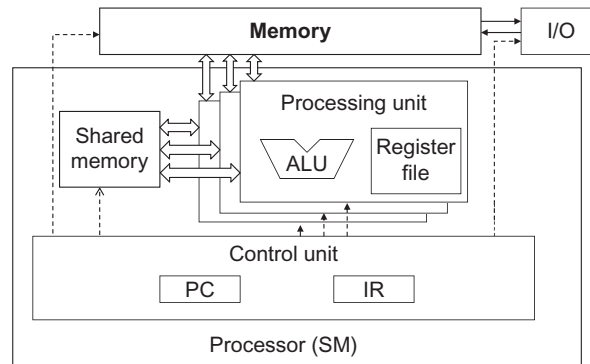

**FIGURE 4.8**

Shared memory vs. registers in a CUDA device SM.

it needs to perform a memory load operation, similar to accessing data in the global memory. However, because shared memory resides on-chip, it can be accessed with much lower latency and much higher throughput than the global memory. Shared memory has longer latency and lower bandwidth than registers because of the need to perform a load operation. In computer architecture terminology, the shared memory is a form of *scratchpad memory*.

One important difference between the shared memory and registers in CUDA is that the variables that reside in the shared memory are accessible by all threads in a block, whereas register data are private to a thread. Shared memory is designed to support efficient, high-bandwidth sharing of data among threads in a block. As shown in Fig. 4.8, a CUDA device SM typically employs multiple processing units, to allow multiple threads to make simultaneous progress (see Processing Units and Threads sidebar). Threads in a block can be spread across these processing units. Therefore, the hardware implementations of the shared memory in these CUDA devices are typically designed to allow multiple processing units to simultaneously access its contents to support efficient data sharing among threads in a block. We will be learning several important types of parallel algorithms that can greatly benefit from such efficient data sharing among threads.

#### PROCESSING UNITS AND THREADS

Now that we have introduced the von Neumann model, we are ready to discuss how threads are implemented. A thread in modern computers is the state of executing a program on a von Neumann Processor. Recall that a thread consists of the code of a program, the particular point in the code that is being executed, and value of its variables and data structures.

In a computer based on the von Neumann model, the code of the program is stored in the memory. The PC keeps track of the particular point of the program that is being executed. The IR holds the instruction that is fetched from the point execution. The register and memory hold the values of the variables and data structures.

Modern processors are designed to allow context-switching, where multiple threads can time-share a processor by taking turns to make progress. By carefully saving and restoring the PC value and the contents of registers and memory, we can suspend the execution of a thread and then correctly resume the execution of the thread later.

Some processors provide multiple processing units, which allow multiple threads to make simultaneous progress. Fig. 4.8 shows a Single-Instruction, Multiple-Data design style where multiple processing units share a PC and IR. Under this design, all threads make simultaneous progress by executing the same instruction in the program.

**Table 4.1** CUDA Variable Type Qualifiers

Variable declaration	Memory	Scope	Lifetime
Automatic variables other than arrays	Register	Thread	Kernel
Automatic array variables	Local	Thread	Kernel
<code>__device__ __shared__ int SharedVar;</code>	Shared	Block	Kernel
<code>__device__ int GlobalVar;</code>	Global	Grid	Application
<code>__device__ __constant__ int ConstVar;</code>	Constant	Grid	Application

It should be clear by now that registers, shared memory, and global memory have different functionalities, latencies, and bandwidths. Therefore, the process of declaring a variable must be understood so that it will reside in the intended type of memory. [Table 4.1](#) presents the CUDA syntax for declaring program variables into the various memory types. Each such declaration also gives its declared CUDA variable a scope and lifetime. Scope identifies the range of threads that can access the variable: a single thread only, all threads of a block, or all threads of all grids. If the scope of a variable is a single thread, a private version of the variable will be created for every thread; each thread can only access its private version of the variable. To illustrate, if a kernel declares a variable whose scope is a thread and it is launched with one million threads, one million versions of the variable will be created so that each thread initializes and uses its own version of the variable.

Lifetime indicates the portion of the program execution duration when the variable is available for use: either within a kernel execution or throughout the entire application. If the lifetime of a variable is within a kernel execution, it must be declared within the kernel function body and will be available for use only *by the kernel code*. If the kernel is invoked several times, the value of the variable is not maintained across these invocations. Each invocation must initialize the variable in order to use them. Meanwhile, if the lifetime of a variable continues throughout the entire application, it must be declared outside of any function body. The contents of these variables are maintained throughout the execution of the application and available to all kernels.

We refer to variables that are not arrays or matrices as *scalar* variables. As shown in [Table 4.1](#), all automatic scalar variables declared in kernel and device functions are placed into registers. The scopes of these automatic variables are within individual threads. When a kernel function declares an automatic variable, a private copy of that variable is generated for every thread that executes the kernel function. When a thread terminates, all its automatic variables also cease to exist. In [Fig. 4.1](#), variables `blurRow`, `blurCol`, `curRow`, `curCol`, `pixels`, and `pixVal` are automatic variables and fall into this category. Note that accessing these variables is extremely fast and parallel; however, one must be careful not to exceed the limited capacity of the register storage in hardware implementations. Using a large number of registers can negatively affect the number of active threads assigned to each SM. We will address this point in [Chapter 5](#), Performance considerations.

Automatic array variables are not stored in registers.<sup>2</sup> Instead, they are stored into the global memory and may incur long access delays and potential access congestions. Similar to automatic scalar variables, the scope of these arrays is limited to individual threads; i.e., a private version of each automatic array is created for and used by every thread. Once a thread terminates its execution, the contents of its automatic array variables also cease to exist. From our experience, automatic array variables are rarely used in kernel functions and device functions.

If a variable declaration is preceded by the “`__shared__`” (each “`_`” consists of two “`_`” characters) keyword, it declares a shared variable in CUDA. An optional “`__device__`” in front of “`__shared__`” keyword may also be added in the declaration to achieve the same effect. Such declaration typically resides within a kernel function or a device function. Shared variables reside in the shared memory. The scope of a shared variable is within a thread block; i.e., all threads in a block see the same version of a shared variable. A private version of the shared variable is created for and used by each thread block during kernel execution. The lifetime of a shared variable is within the duration of the kernel. When a kernel terminates its execution, the contents of its shared variables cease to exist. As discussed earlier, shared variables are an efficient means for threads within a block to collaborate with one another. Accessing shared variables from the shared memory is extremely fast and highly parallel. CUDA programmers often use shared variables to hold the portion of global memory data that are heavily used in a kernel execution phase. The algorithms may need to be adjusted to create execution phases that heavily focus on small portions of the global memory data, as we will demonstrate with matrix multiplication in [Section 4.4](#).

If a variable declaration is preceded by the keyword “`__constant__`” (each “`_`” consists of two “`_`” characters), it declares a constant variable in CUDA. An optional “`__device__`” keyword may also be added in front of “`__constant__`” to achieve the same effect. Declaration of constant variables must be outside any function body. The scope of a constant variable spans all grids, meaning that all threads in all grids see the same version of a constant variable. The lifetime of a constant variable is the entire application execution. Constant variables are often used for variables that provide input values to kernel functions. Constant variables are stored in the global memory but are cached for efficient access. With appropriate access patterns, accessing constant memory is extremely fast and parallel. Currently, the total size of constant variables in an application is limited to 65,536 bytes. The input data volume may need to be divided to fit within this limitation, as we will illustrate in [Chapter 7](#), Parallel pattern: convolution.

A variable whose declaration is preceded only by the keyword “`__device__`” (each “`_`” consists of two “`_`” characters) is a global variable and will be placed in the global memory. Accesses to a global variable are slow. Latency and throughput of accessing global variables have been improved with caches in relatively recent

---

<sup>2</sup>There are some exceptions to this rule. The compiler may decide to store an automatic array into registers if all accesses are done with constant index values.

devices. One important advantage of global variables is that they are visible to all threads of all kernels. Their contents also persist throughout the entire execution. Thus, global variables can be used as a means for threads to collaborate across blocks. However, the only easy way to synchronize between threads from different thread blocks or to ensure data consistency across threads when accessing global memory is by terminating the current kernel execution.<sup>3</sup> Therefore, global variables are often used to pass information from one kernel invocation to another kernel invocation.

In CUDA, pointers are used to point to data objects in the global memory. Pointer usage arises in kernel and device functions in two ways: (1) if an object is allocated by a host function, the pointer to the object is initialized by `cudaMalloc` and can be passed to the kernel function as a parameter (e.g., the parameters `M`, `N`, and `P` in Fig. 4.3) and (2) the address of a variable declared in the global memory is assigned to a pointer variable. To illustrate, the statement `{float* ptr= &GlobalVar;}` in a kernel function assigns the address of `GlobalVar` into an automatic pointer variable `ptr`. The reader should refer to the CUDA Programming Guide for using pointers in other memory types.

---

## 4.4 TILING FOR REDUCED MEMORY TRAFFIC

We have an intrinsic tradeoff in the use of device memories in CUDA: the global memory is large but slow, whereas the shared memory is small but fast. A common strategy is to partition the data into subsets called *tiles* so that each tile fits into the shared memory. The term “tile” draws on the analogy that a large wall (i.e., the global memory data) can be covered by tiles (i.e., subsets that each can fit into the shared memory). An important criterion is that kernel computation on these tiles can be performed independently of each other. Note that not all data structures can be partitioned into tiles given an arbitrary kernel function.

The concept of tiling can be illustrated using the matrix multiplication example in Fig. 4.5, which corresponds to the kernel function in Fig. 4.3. We replicate the example in Fig. 4.9 for convenient reference by the reader. For brevity, we use  $P_{y,x}$ ,  $M_{y,x}$ , and  $N_{y,x}$  to represent  $P[y*Width+ x]$ ,  $M[y*Width+ x]$ , and  $N[y*Width+ x]$ , respectively. This example assumes that we use four  $2 \times 2$  blocks to compute the  $P$  matrix. Fig. 4.9 highlights the computation performed by the four threads of block(0,0). These four threads compute for  $P_{0,0}$ ,  $P_{0,1}$ ,  $P_{1,0}$ , and  $P_{1,1}$ . The accesses to the  $M$  and  $N$  elements by thread(0,0) and thread(0,1) of block(0,0) are highlighted with black arrows; e.g., thread(0,0) reads  $M_{0,0}$  and  $N_{0,0}$ , followed by  $M_{0,1}$  and  $N_{1,0}$ , followed by  $M_{0,2}$  and  $N_{2,0}$ , followed by  $M_{0,3}$  and  $N_{3,0}$ .

Fig. 4.10 shows the global memory accesses performed by all threads in block<sub>0,0</sub>. The threads are listed in the vertical direction, with time of access increasing to the

---

<sup>3</sup>Note that one can use CUDA memory fencing to ensure data coherence between thread blocks if the number of thread blocks is smaller than the number of SMs in the CUDA device. See the CUDA programming guide for more details.

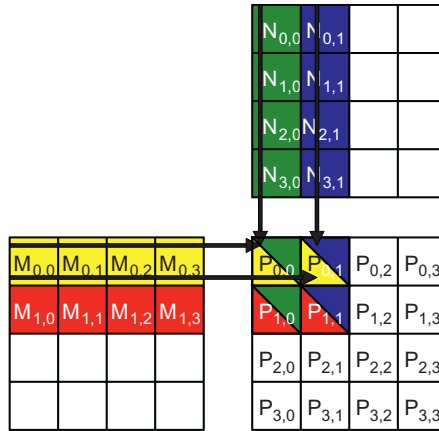


FIGURE 4.9

A small example of matrix multiplication. For brevity, we show  $M[y*Width+ x]$ ,  $N[y*Width + x]$ ,  $P[y*Width+ x]$  as  $M_{y,x}$ ,  $N_{y,x}$ ,  $P_{y,x}$ .

Access order  $\longrightarrow$

thread <sub>0,0</sub>	$M_{0,0} * N_{0,0}$	$M_{0,1} * N_{1,0}$	$M_{0,2} * N_{2,0}$	$M_{0,3} * N_{3,0}$
thread <sub>0,1</sub>	$M_{0,0} * N_{0,1}$	$M_{0,1} * N_{1,1}$	$M_{0,2} * N_{2,1}$	$M_{0,3} * N_{3,1}$
thread <sub>1,0</sub>	$M_{1,0} * N_{0,0}$	$M_{1,1} * N_{1,0}$	$M_{1,2} * N_{2,0}$	$M_{1,3} * N_{3,0}$
thread <sub>1,1</sub>	$M_{1,0} * N_{0,1}$	$M_{1,1} * N_{1,1}$	$M_{1,2} * N_{2,1}$	$M_{1,3} * N_{3,1}$


FIGURE 4.10

Global memory accesses performed by threads in block<sub>0,0</sub>.

right in the horizontal direction. Each thread accesses four elements of  $M$  and four elements of  $N$  during execution. Among the four threads highlighted, a significant overlap occurs in the  $M$  and  $N$  elements they access. For instance, both thread<sub>0,0</sub> and thread<sub>0,1</sub> access  $M_{0,0}$  and the rest of row 0 of  $M$ . Similarly, both thread<sub>0,1</sub> and thread<sub>1,1</sub> access  $N_{0,1}$  and the rest of column 1 of  $N$ .

The kernel in Fig. 4.3 is written so that both thread<sub>0,0</sub> and thread<sub>0,1</sub> access row 0 elements of  $M$  from the global memory. If thread<sub>0,0</sub> and thread<sub>0,1</sub> can be made to collaborate so that these  $M$  elements are only loaded from the global memory once, the total number of accesses to the global memory can be reduced by half. Every  $M$  and  $N$  element is accessed exactly twice during the execution of block<sub>0,0</sub>. Therefore, if all four threads can be made to collaborate in their accesses to global memory, traffic to the global memory can be reduced by half.

Readers should verify that the potential reduction in global memory traffic in the matrix multiplication example is proportional to the dimension of the blocks used.

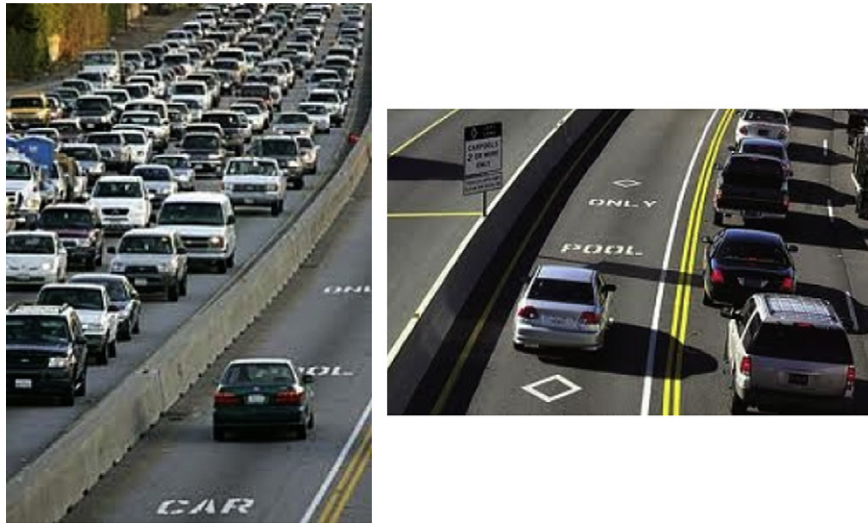

**FIGURE 4.11**


Reducing traffic congestion in highway systems.

With  $\text{Width} \times \text{Width}$  blocks, the potential reduction of global memory traffic would be  $\text{Width}$ . Thus, if we use  $16 \times 16$  blocks, the global memory traffic can be potentially reduced to  $1/16$  through collaboration between threads.

Traffic congestion arises not only in computing but in highway systems as well, as illustrated in Fig. 4.11. The root cause of highway traffic congestion is too many cars squeezing through a road that is designed for a much smaller number of vehicles. When congestion occurs, the travel time for each vehicle is greatly increased. Commute time to work can easily double or triple during traffic congestion.

Most solutions for reduced traffic congestion involve reduction of cars on the road. Assuming that the number of commuters is constant, people need to share rides in order to reduce the number of cars on the road. A common way to share rides in the US is carpooling, where a group of commuters take turns to drive the group to work in one vehicle. The government usually needs to create policies encouraging carpooling. In some countries, the government simply bans certain classes of cars from the road on a daily basis. For example, cars with odd license plates may not be allowed on the road on Monday, Wednesday, or Friday. This rule encourages people whose cars are allowed on different days to form a carpool group. In some countries, gasoline price is so high that people form carpools to save money. In other countries, the government may provide incentives for behaviors that reduce the number of cars on the road. In the US, some lanes of congested highways are designated as carpool lanes; only cars with more than two or three people are allowed to use these lanes. All of these measures for encouraging carpooling are designed to overcome the fact that carpooling requires extra effort, as shown in Fig. 4.12.

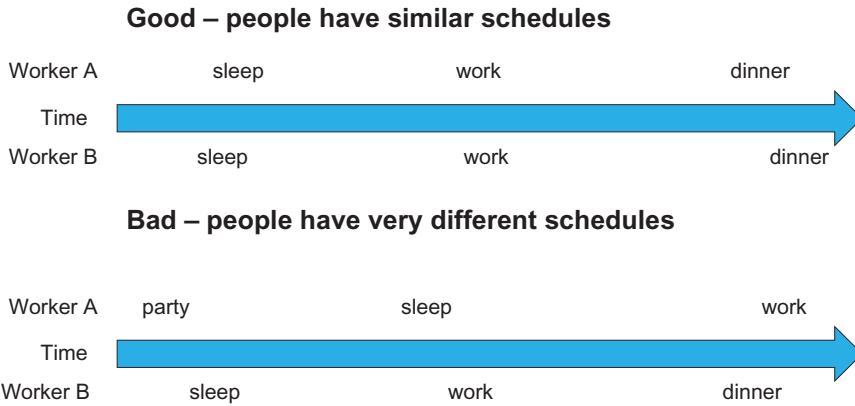


**FIGURE 4.12**

Carpooling requires synchronization among people.

Carpooling requires workers who wish to carpool to compromise and agree on a common commute schedule. The top half of Fig. 4.12 presents a good schedule pattern for carpooling. Time goes from left to right. Workers A and B share a similar schedule for sleep, work, and dinner. This schedule allows these two workers to conveniently go to work and return home in one car. Their similar schedules allow them to easily agree on common departure and return times. By contrast, the schedules in the bottom half of Fig. 4.12 show Workers A and B having different habits: Worker A parties until sunrise, sleeps during the day, and goes to work in the evening; Worker B sleeps at night, goes to work in the morning, and returns home for dinner at 6 p.m. The schedules are so different that these two workers cannot arrange a common time to drive to work and return home in one car. For these workers to form a carpool, they need to negotiate a common schedule similar to that in the top half of Fig. 4.12.

Tiled algorithms are highly similar to carpooling arrangements. We can consider threads accessing data values as commuters and DRAM access requests as vehicles. When the rate of DRAM requests exceeds the provisioned access bandwidth of the DRAM system, traffic congestion arises and the arithmetic units become idle. If multiple threads access data from the same DRAM location, they can potentially form a “carpool” and combine their accesses into one DRAM request. However, this process requires a similar execution schedule for the threads so that their data accesses can be combined. This scenario is shown in Fig. 4.13, where the cells at the center represent DRAM locations. An arrow from a DRAM location pointing to a thread represents an access by the thread to that location at the time marked by the head of the arrow. Note that the time goes from left to right. The top portion shows two threads that access the same data elements with similar timing. The bottom half shows two threads that access their common data at varying times; i.e., the accesses by Thread 2 lag significantly behind their corresponding accesses by Thread 1. The reason the

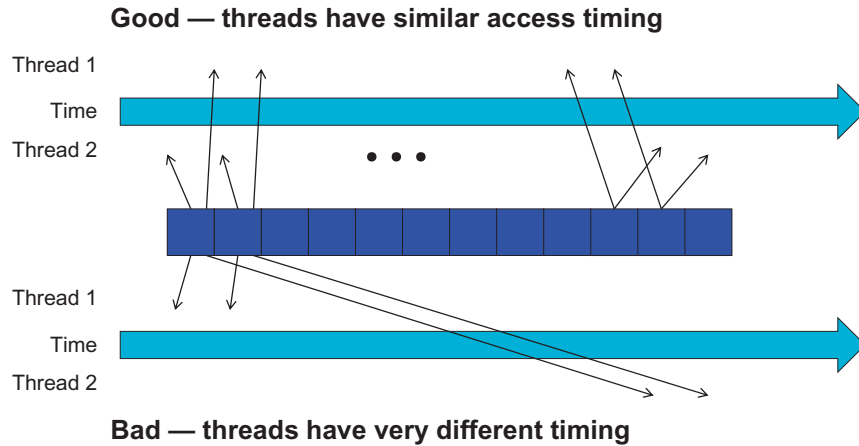**FIGURE 4.13**

Tiled Algorithms require synchronization among threads.

bottom is an undesirable arrangement is that data elements that are brought back from the DRAM need to be stored in the on-chip memory for an extended time, waiting to be consumed by Thread 2. A large number of data elements will need to be stored, resulting in an excessive on-chip memory requirement.

In the context of parallel computing, tiling is a program transformation technique that localizes the memory locations accessed among threads and the timing of their accesses. It divides the long access sequences of each thread into phases and uses barrier synchronization to keep the timing of accesses to each section at close intervals. This technique controls the amount of on-chip memory required by localizing the accesses both in time and in space. In terms of our carpool analogy, we force the threads that form the “carpool” group to follow approximately the same execution timing.

We now present a tiled matrix multiplication algorithm. The basic idea is for the threads to collaboratively load subsets of the  $M$  and  $N$  elements into the shared memory before they individually use these elements in their dot product calculation. The size of the shared memory is quite small, and the capacity of the shared memory should not be exceeded when these  $M$  and  $N$  elements are loaded into the shared memory. This condition can be satisfied by dividing the  $M$  and  $N$  matrices into smaller tiles so that they can fit into the shared memory. In the simplest form, the tile dimensions equal those of the block, as illustrated in Fig. 4.11.

In Fig. 4.14, we divide  $M$  and  $N$  into  $2 \times 2$  tiles, as delineated by the thick lines. The dot product calculations performed by each thread are now divided into phases. In each phase, all threads in a block collaborate to load a tile of  $M$  and a tile of  $N$  into the shared memory. This collaboration can be accomplished by having every thread in a block to load one  $M$  element and one  $N$  element into the shared memory,

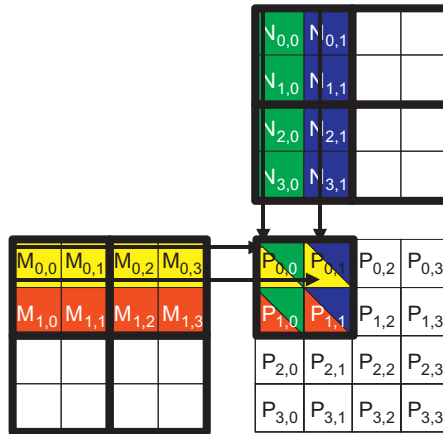


FIGURE 4.14

Tiling  $M$  and  $N$  to utilize shared memory.

	Phase 1			Phase 2		
thread <sub>0,0</sub>	$M_{0,0}$ ↓ Mds <sub>0,0</sub>	$N_{0,0}$ ↓ Nds <sub>0,0</sub>	$PValue_{0,0} +=$ $Mds_{0,0} * Nds_{0,0} +$ $Mds_{0,1} * Nds_{1,0}$	$M_{0,2}$ ↓ Mds <sub>0,0</sub>	$N_{2,0}$ ↓ Nds <sub>0,0</sub>	$PValue_{0,0} +=$ $Mds_{0,0} * Nds_{0,0} +$ $Mds_{0,1} * Nds_{1,0}$
thread <sub>0,1</sub>	$M_{0,1}$ ↓ Mds <sub>0,1</sub>	$N_{0,1}$ ↓ Nds <sub>1,0</sub>	$PValue_{0,1} +=$ $Mds_{0,0} * Nds_{0,1} +$ $Mds_{0,1} * Nds_{1,1}$	$M_{0,3}$ ↓ Mds <sub>0,1</sub>	$N_{2,1}$ ↓ Nds <sub>0,1</sub>	$PValue_{0,1} +=$ $Mds_{0,0} * Nds_{0,1} +$ $Mds_{0,1} * Nds_{1,1}$
thread <sub>1,0</sub>	$M_{1,0}$ ↓ Mds <sub>1,0</sub>	$N_{1,0}$ ↓ Nds <sub>1,0</sub>	$PValue_{1,0} +=$ $Mds_{1,0} * Nds_{0,0} +$ $Mds_{1,1} * Nds_{1,0}$	$M_{1,2}$ ↓ Mds <sub>1,0</sub>	$N_{3,0}$ ↓ Nds <sub>1,0</sub>	$PValue_{1,0} +=$ $Mds_{1,0} * Nds_{0,0} +$ $Mds_{1,1} * Nds_{1,0}$
thread <sub>1,1</sub>	$M_{1,1}$ ↓ Mds <sub>1,1</sub>	$N_{1,1}$ ↓ Nds <sub>1,1</sub>	$PValue_{1,1} +=$ $Mds_{1,0} * Nds_{0,1} +$ $Mds_{1,1} * Nds_{1,1}$	$M_{1,3}$ ↓ Mds <sub>1,1</sub>	$N_{3,1}$ ↓ Nds <sub>1,1</sub>	$PValue_{1,1} +=$ $Mds_{1,0} * Nds_{0,1} +$ $Mds_{1,1} * Nds_{1,1}$

time →

FIGURE 4.15

Execution phases of a tiled matrix multiplication.

as illustrated in Fig. 4.15. Each row in Fig. 4.15 shows the execution activities of a thread. Note that time progresses from left to right. We only need to show the activities of threads in block<sub>0,0</sub>; all of the other blocks have the same behavior. The shared memory array for the  $M$  elements is called  $Mds$ , and that for the  $N$  elements is called  $Nds$ . At the beginning of Phase 1, the four threads of block<sub>0,0</sub> collaboratively load a tile of  $M$  into a shared memory: thread<sub>0,0</sub> loads  $M_{0,0}$  into  $Mds_{0,0}$ , thread<sub>0,1</sub> loads  $M_{0,1}$  into  $Mds_{0,1}$ , thread<sub>1,0</sub> loads  $M_{1,0}$  into  $Mds_{1,0}$ , and thread<sub>1,1</sub> loads  $M_{1,1}$  into  $Mds_{1,1}$ ,

as shown in the second column in Fig. 4.15. A tile of  $N$  is also similarly loaded, as presented in the third column in Fig. 4.15.

After the two tiles of  $M$  and  $N$  are loaded into the shared memory, these elements are used in the calculation of the dot product. Each value in the shared memory is used twice; e.g., the  $M_{1,1}$  value loaded by  $\text{thread}_{1,1}$  into  $\text{Mds}_{1,1}$  is used twice: the first time by  $\text{thread}_{1,0}$  and the second time by  $\text{thread}_{1,1}$ . By loading each global memory value into the shared memory so that it can be used multiple times, we reduce the number of accesses to the global memory; in this case, we reduce it by half. The reader should verify that the reduction occurs by a factor of  $N$  if the tiles are  $N \times N$  elements.

Note that the calculation of each dot product in Fig. 4.3 is now performed in two phases, Phases 1 and 2 in Fig. 4.15. In each phase, the products of two pairs of the input matrix elements are accumulated into the `Pvalue` variable. `Pvalue` is an automatic variable; a private version is generated for each thread. We added subscripts to indicate different instances of the `Pvalue` variable created for each thread. The first- and second-phase calculations are shown in the fourth and seventh columns in Fig. 4.15, respectively. In general, if an input matrix is of the dimension `Width` and the tile size is referred to as `TILE_WIDTH`, the dot product would be performed in `Width/TILE_WIDTH` phases. The creation of these phases is key to the reduction of accesses to the global memory. With each phase focusing on a small subset of the input matrix values, the threads can collaboratively load the subset into the shared memory and use the values in the shared memory to satisfy their overlapping input demands in the phase.

Note also that `Mds` and `Nds` are reused to hold the input values. In each phase, the same `Mds` and `Nds` are used to hold the subset of  $M$  and  $N$  elements in the phase, thereby allowing a much smaller shared memory to serve most of the accesses to global memory. This is due to the fact that each phase focuses on a small subset of the input matrix elements. Such focused access behavior is called locality. When an algorithm exhibits locality, an opportunity arises to use small, high-speed memories in order to serve most of the accesses and remove these accesses from the global memory. Locality is as important for achieving high-performance in multi-core CPUs as in many-thread GPUs. We will return to the concept of locality in Chapter 5, Performance considerations.

---

## 4.5 A TILED MATRIX MULTIPLICATION KERNEL

We are now ready to present a tiled matrix multiplication kernel that uses shared memory to reduce traffic to the global memory. The kernel presented in Fig. 4.16 implements the phases illustrated in Fig. 4.15. In Fig. 4.16, Lines 1 and 2 declare `Mds` and `Nds` as shared memory variables. Recall that the scope of shared memory variables is a block. Thus, one pair of `Mds` and `Nds` will be created for each block, and all threads of a block can access the same `Mds` and `Nds`. This is important since all threads in a block must have access to the  $M$  and  $N$  elements loaded

```

__global__ void MatrixMulKernel(float* d_M, float* d_N, float* d_P,
    int Width) {

1.  __shared__ float Mds[TILE_WIDTH][TILE_WIDTH];
2.  __shared__ float Nds[TILE_WIDTH][TILE_WIDTH];

3.  int bx = blockIdx.x;  int by = blockIdx.y;
4.  int tx = threadIdx.x; int ty = threadIdx.y;

    // Identify the row and column of the d_P element to work on
5.  int Row = by * TILE_WIDTH + ty;
6.  int Col = bx * TILE_WIDTH + tx;

7.  float Pvalue = 0;
    // Loop over the d_M and d_N tiles required to compute d_P element
8.  for (int ph = 0; ph < Width/TILE_WIDTH; ++ph) {

        // Collaborative loading of d_M and d_N tiles into shared memory
9.  Mds[ty][tx] = d_M[Row*Width + ph*TILE_WIDTH + tx];
10. Nds[ty][tx] = d_N[(ph*TILE_WIDTH + ty)*Width + Col];
11. __syncthreads();

12.   for (int k = 0; k < TILE_WIDTH; ++k) {
13.       Pvalue += Mds[ty][k] * Nds[k][tx];
14.   }
15.   __syncthreads();
16.   d_P[Row*Width + Col] = Pvalue;
}

```


**FIGURE 4.16**

A tiled Matrix Multiplication Kernel using shared memory.

into `Mds` and `Nds` by their peers so that they can use these values to satisfy their input needs.

Lines 3 and 4 save the `threadIdx` and `blockIdx` values into automatic variables and thus into registers for fast access. Recall that automatic scalar variables are placed into registers. Their scope is in each individual thread; i.e., one private version of `tx`, `ty`, `bx`, and `by` is created by the run-time system for each thread and will reside in registers that are accessible by the thread. They are initialized with the `threadIdx` and `blockIdx` values and used many times during the lifetime of the thread. Once the thread ends, the values of these variables cease to exist.

Lines 5 and 6 determine the row and column indexes of the `P` element to be produced by the thread. The code assumes that each thread is responsible for calculating one `P` element. As shown in Line 6, the horizontal (x) position, or the column index of the `P` element to be produced by a thread, can be calculated as `bx*TILE_WIDTH+tx` because each block covers `TILE_WIDTH` elements in the horizontal dimension. A thread in block `bx` would have `bx` blocks of threads, or `(bx*TILE_WIDTH)` threads, before it; they cover `bx*TILE_WIDTH` elements of `P`. Another `tx` threads within the same block would cover another `tx` elements. Thus, the thread with `bx` and `tx` should be responsible for calculating the `P` element whose x index is `bx*TILE_WIDTH+tx`.

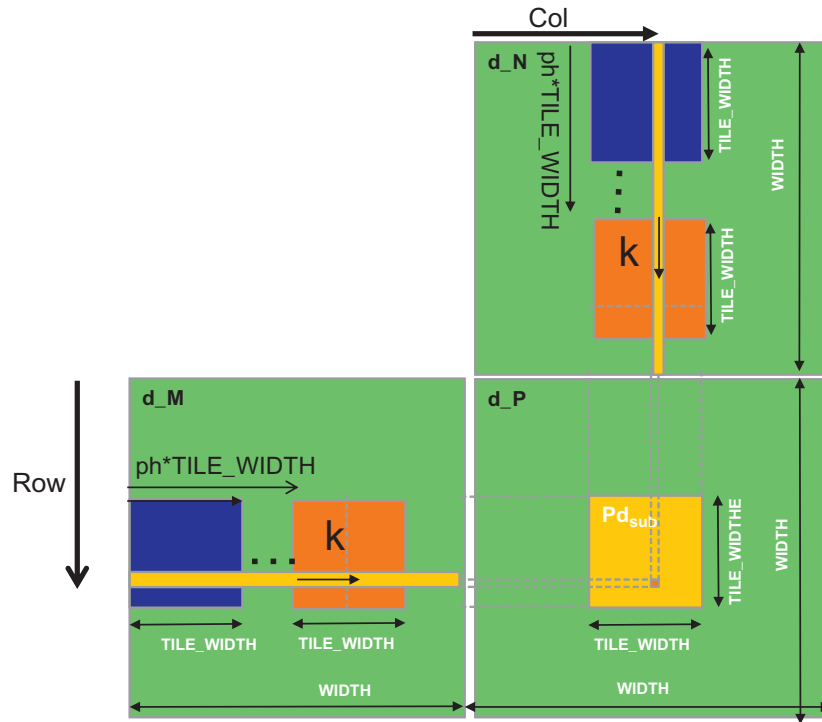

**FIGURE 4.17**

Calculation of the matrix indexes in tiled multiplication.

This horizontal index is saved in the variable `Col` for the thread and is also illustrated in Fig. 4.17.

In Fig. 4.14, the  $x$  index of the  $P$  element to be calculated by  $\text{thread}_{0,1}$  of  $\text{block}_{1,0}$  is  $0*2 + 1 = 1$ . Similarly, the  $y$  index can be calculated as  $\text{by} * \text{TILE\_WIDTH} + \text{ty}$ . This vertical index is saved in the variable `Row` for the thread. Thus, each thread calculates the  $P$  element at the  $\text{Col}^{\text{th}}$  column and the  $\text{Row}^{\text{th}}$  row, as shown in Fig. 4.17. Recalling the example in Fig. 4.14, the  $y$  index of the  $P$  element to be calculated by  $\text{thread}_{1,0}$  of  $\text{block}_{0,1}$  is  $1*2 + 0 = 2$ . Thus, the  $P$  element to be calculated by this thread is  $P_{2,1}$ .

Line 8 in Fig. 4.16 marks the beginning of the loop that iterates through all the phases of calculating the  $P$  element. Each iteration of the loop corresponds to one phase of the calculation presented in Fig. 4.15. The `ph` variable indicates the number of phases that have already been done for the dot product. Recall that each phase uses one tile of  $M$  and one tile of  $N$  elements. Therefore, at the beginning of each phase,  $\text{ph} * \text{TILE\_WIDTH}$  pairs of  $M$  and  $N$  elements have been processed by previous phases.

In each phase, Line 9 loads the appropriate  $M$  element into the shared memory. Since we already know the row of  $M$  and column of  $N$  to be processed by the thread, we now discuss the column index of  $M$  and row index of  $N$ . As shown in Fig. 4.17,

each block has  $\text{TILE\_WIDTH}^2$  threads that will collaborate to load  $\text{TILE\_WIDTH}^2$   $M$  elements into the shared memory. Thus, we only need to assign each thread to load one  $M$  element, which can be conveniently accomplished using `blockIdx` and `threadIdx`. The beginning column index of the section of  $M$  elements to be loaded is `ph*TILE_WIDTH`. Therefore, an easy approach is to have every thread load an element that is `tx` (the `threadIdx.x` value) positions away from that beginning point.

This case is represented by Line 9, where each thread loads  $M[\text{Row} \times \text{Width} + \text{ph} \times \text{TILE\_WIDTH} + \text{tx}]$ , where the linearized index is formed with the row index `Row` and column index `ph*TILE_WIDTH + tx`. Since the value of `Row` is a linear function of `ty`, each of the  $\text{TILE\_WIDTH}^2$  threads will load a unique  $M$  element into the shared memory. Together, these threads will load a dark square subset of  $M$  in Fig. 4.17. The reader should use the examples in Fig. 4.14 and Fig. 4.15 to verify that the address calculation works correctly for individual threads.

The barrier `__syncthreads()` in Line 11 ensures that all threads have finished loading the tiles of  $M$  and  $N$  into `Mds` and `Nds` before any of them can move forward. The loop in Line 12 then performs one phase of the dot product on the basis of these tile elements. The progression of the loop for `threadty,tx` is shown in Fig. 4.17, with the access direction of the  $M$  and  $N$  elements along the arrow marked with `k`, the loop variable in Line 12. These elements will be accessed from `Mds` and `Nds`, the shared memory arrays holding these  $M$  and  $N$  elements. The barrier `__syncthreads()` in Line 14 ensures that all threads have finished using the  $M$  and  $N$  elements in the shared memory before any of them move on to the next iteration and load the elements from the next tiles. In this manner, none of the threads would load the elements too early and corrupt the input values for other threads.

The nested loop from Line 8 to Line 14 illustrates a technique called *strip-mining*, which takes a long-running loop and break it into phases. Each phase consists of an inner loop that executes a number of consecutive iterations of the original loop. The original loop becomes an outer loop whose role is to iteratively invoke the inner loop so that all the iterations of the original loop are executed in their original order. By adding barrier synchronizations before and after the inner loop, we force all threads in the same block to focus their work entirely on a section of their input data. Strip-mining can create the phases needed by tiling in data parallel programs.<sup>4</sup>

After all phases of the dot product are completed, the execution exits the loop of Line 8. All threads write to their  $P$  element by using the linearized index calculated from `Row` and `Col`.

The tiled algorithm provides a substantial benefit. For matrix multiplication, the global memory accesses are reduced by a factor of  $\text{TILE\_WIDTH}$ . If one uses  $16 \times 16$  tiles, we can reduce the global memory accesses by a factor of 16. This increases the compute-to-global-memory-access ratio from 1 to 16. This improvement

<sup>4</sup>Interested reader should note that strip-mining has long been used in programming CPUs. Strip-mining followed by loop interchange is often used to enable tiling for improved locality in sequential programs. Strip-mining is also the main vehicle for vectorizing compilers to generate vector or Single-Instruction, Multiple-Data instructions for CPU programs.

allows the memory bandwidth of a CUDA device to support a computation rate close to its peak performance; e.g. a device with 150 GB/s global memory bandwidth can approach  $((150/4)*16) = 600$  GFLOPS!

While the performance improvement of the tiled matrix multiplication kernel is impressive, it includes a few simplifying assumptions. First, the width of the matrices is assumed to be a multiple of the width of the thread blocks. This assumption prevents the kernel from correctly processing arbitrary-sized matrices. The second assumption is that the matrices are square matrices, which is not always true in real-life settings. In the next section, we will present a kernel with boundary checks that remove these assumptions.

## 4.6 BOUNDARY CHECKS

We now extend the tiled matrix multiplication kernel to handle matrices with arbitrary widths. The extensions will have to allow the kernel to correctly handle matrices whose width is not a multiple of the tile width. By changing the example in Fig. 4.14 to  $3 \times 3$   $M$ ,  $N$ , and  $P$  matrices, Fig. 4.18 is created. The matrices have a width of 3, which is not a multiple of the tile width (2). Fig. 4.18 shows the memory access pattern during phase 1 of  $\text{block}_{0,0}$ .  $\text{Thread}_{0,1}$  and  $\text{thread}_{1,1}$  will attempt to load  $M$  elements that do not exist. Similarly,  $\text{thread}_{1,0}$  and  $\text{thread}_{1,1}$  will attempt to access  $N$  elements that do not exist.

Accessing nonexistent elements is problematic in two ways. Accessing a nonexistent element past the end of a row ( $M$  accesses by  $\text{thread}_{1,0}$  and  $\text{thread}_{1,1}$  in Fig. 4.18) will be done to incorrect elements. In our example, the threads will attempt to access  $M_{0,3}$  and  $M_{1,3}$ , both of which do not exist. In this case, what will happen to these

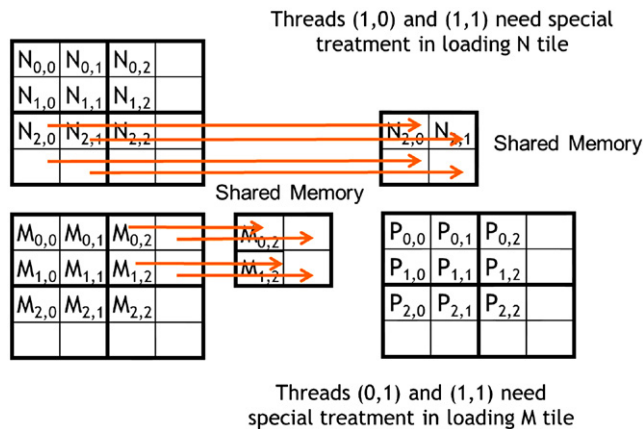


FIGURE 4.18

Loading input matrix elements that are close to the edge—phase 1 of  $\text{Block}_{0,0}$ .



memory loads? To answer this question, we need to go back to the linearized layout of 2D matrices. The element after  $M_{0,2}$  in the linearized layout is  $M_{1,0}$ . Although  $\text{thread}_{0,1}$  is attempting to access  $M_{0,3}$ , it will instead obtain  $M_{1,0}$ . The use of this value in the subsequent inner product calculation will certainly corrupt the output value.

A similar problem arises when accessing an element past the end of a column ( $N$  accesses by  $\text{thread}_{1,0}$  and  $\text{thread}_{1,1}$  in Fig. 4.18). These accesses are to memory locations outside the allocated area for the array. Some systems will return random values from other data structures, whereas others will reject these accesses and cause the program to abort. Either way, such accesses lead to undesirable outcomes.

From our discussion thus far, the problematic accesses only seem to arise in the last phase of execution of the threads. This observation suggests that the problem can be dealt with by taking special actions during the last phase of the tiled kernel execution. Unfortunately, problematic accesses can occur in all phases. Fig. 4.19 shows the memory access pattern of  $\text{block}_{1,1}$  during phase 0. We see that  $\text{thread}_{1,0}$  and  $\text{thread}_{1,1}$  attempt to access nonexistent  $M$  elements  $M_{3,0}$  and  $M_{3,1}$ , whereas  $\text{thread}_{0,1}$  and  $\text{thread}_{1,1}$  attempt to access  $N_{0,3}$  and  $N_{1,3}$ , which do not exist.

Note that these problematic accesses cannot be prevented by excluding the threads that do not calculate valid  $P$  elements. For instance,  $\text{thread}_{1,0}$  in  $\text{block}_{1,1}$  does not calculate any valid  $P$  element. However, it needs to load  $M_{2,1}$  during phase 0. Further, some threads that calculate valid  $P$  elements will attempt to access  $M$  or  $N$  elements that do not exist. As shown in Fig. 4.18,  $\text{thread}_{0,1}$  of  $\text{block}_{0,0}$  calculates a valid  $P$  element  $P_{0,1}$ . However, it attempts to access a nonexistent  $M_{0,3}$  during phase 1. These observations indicate that different boundary condition tests need to be conducted for loading  $M$  tiles, loading  $N$  tiles, and calculating/storing  $P$  elements.

We start with the boundary test condition for loading input tiles. When a thread intends to load an input tile element, it should test that input element for validity,

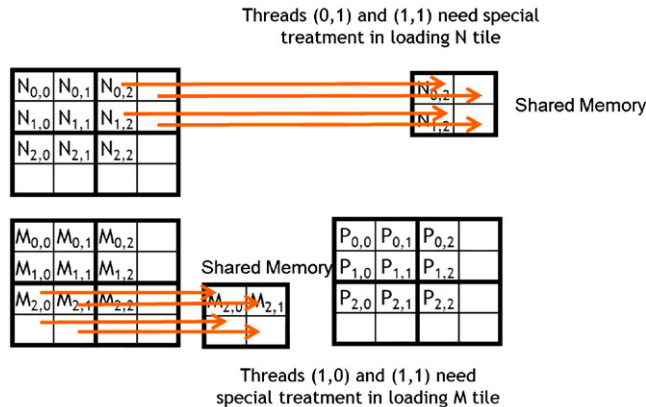


FIGURE 4.19

Loading input elements during phase 0 of  $\text{block}_{1,0}$ .

which is easily done by examining the  $y$  and  $x$  indexes. To illustrate, at Line 9 in Fig. 4.16, the linearized index is derived from a  $y$  index of  $Row$  and an  $x$  index of  $ph * TILE\_WIDTH + tx$ . The boundary condition test would be that both indexes are smaller than  $Width$ :  $(Row < Width) \ \&\& \ (ph * TILE\_WIDTH + tx) < Width$ . If the condition is satisfied, the thread should load the  $M$  element. The reader should verify that the condition test for loading the  $N$  element is  $(ph * TILE\_WIDTH + ty) < Width \ \&\& \ Col < Width$ .

If the condition is not satisfied, the thread should not load the element, in which case, the question is what should be placed into the shared memory location. The answer is 0.0, a value that will not cause any harm if used in the inner product calculation. If any thread uses this 0.0 value in the calculation of its inner product, no change will be observed in the inner product value.

Finally, a thread should only store its final inner product value if it is responsible for calculating a valid  $P$  element. The test for this condition is  $(Row < Width) \ \&\& \ (Col < Width)$ . The kernel code with the additional boundary condition checks is shown in Fig. 4.20.

With the boundary condition checks, the tile matrix multiplication kernel is just one more step away from being a general matrix multiplication kernel. In general, matrix multiplication is defined for rectangular matrices: a  $j \times k$   $M$  matrix multiplied by a  $k \times l$   $N$  matrix results in a  $j \times l$   $P$  matrix. Currently, our kernel can only handle square matrices.

Fortunately, our kernel can be easily extended to a general matrix multiplication kernel by making simple modifications. First, the  $Width$  argument is replaced by three unsigned integer arguments  $j$ ,  $k$ , and  $l$ . Where  $Width$  is used to refer to the height of  $M$  or height of  $P$ , it may be replaced with  $j$ . Where  $Width$  is used to refer to the width of  $M$  or height of  $N$ , it may be replaced with  $k$ . Where  $Width$  is used to refer to the width of  $N$  or width of  $P$ , it may be replaced with  $l$ . The revision of the kernel with these changes is left as an exercise.

```

// Loop over the M and N tiles required to compute P element
8.   for (int ph = 0; ph < ceil(Width/(float)TILE_WIDTH); ++ph) {
    // Collaborative loading of M and N tiles into shared memory
9.   if ((Row < Width) && (ph * TILE_WIDTH + tx) < Width)
        Mds[ty][tx] = M[Row * Width + ph * TILE_WIDTH + tx];
10.  if ((ph * TILE_WIDTH + ty) < Width && Col < Width)
        Nds[ty][tx] = N[(ph * TILE_WIDTH + ty) * Width + Col];

11.  __syncthreads();

12.  for (int k = 0; k < TILE_WIDTH; ++k) {
13.      Pvalue += Mds[ty][k] * Nds[k][tx];
    }
14.  __syncthreads();
    }
15.  if ((Row < Width) && (Col < Width)) P[Row * Width + Col] = Pvalue;

```

**FIGURE 4.20**

Tiled matrix multiplication kernel with boundary condition checks.

## 4.7 MEMORY AS A LIMITING FACTOR TO PARALLELISM

While CUDA registers and shared memory can be extremely effective in reducing the number of accesses to global memory, one must be careful to stay within the capacity of these memories. These memories are forms of resources necessary for thread execution. Each CUDA device offers limited resources, thereby limiting the number of threads that can simultaneously reside in the SM for a given application. In general, the more resources each thread requires, the fewer the threads that can reside in each SM, and likewise, the fewer the threads that can run in parallel in the entire device.

To illustrate the interaction between register usage of a kernel and the level of parallelism that a device can support, assume that in a current-generation device *D*, each SM can accommodate up to 1536 threads and 16,384 registers. While 16,384 is a large number, each thread is only allowed to use a very limited number of registers, considering the number of threads that can reside in each SM. To support 1536 threads, each thread can use only  $16,384/1536 = 10$  registers. If each thread uses 11 registers, the number of threads that can be executed concurrently in each SM will be reduced. Such reduction occurs at the block granularity; e.g., if each block contains 512 threads, the reduction of threads will be accomplished by reducing 512 threads at a time. Thus, the next smaller number of threads from 1536 will be 1024, indicating a 1/3 reduction of threads that can simultaneously reside in each SM. This procedure can substantially reduce the number of warps available for scheduling, thereby decreasing the ability of the processor to find useful work in the presence of long-latency operations.

The number of registers available to each SM varies from one device to another. An application can dynamically determine the number of registers available in each SM of the device used and choose a version of the kernel that uses the number of registers appropriate for the device. The number of registers can be determined by calling the `cudaGetDeviceProperties` function, which was discussed in [Section 3.6](#). Assume that the variable `&dev_prop` is passed to the function for the device property and the field `dev_prop.regsPerBlock` generates the number of registers available in each SM. For device *D*, the returned value for this field should be 16,384. The application can then divide this number by the targeted number of threads to reside in each SM to determine the number of registers that can be used in the kernel.

Shared memory usage can also limit the number of threads assigned to each SM. We can assume that the same device *D* has 16,384 (16K) bytes of shared memory, is allocated to thread blocks, in each SM. We can also assume that each SM in *D* can accommodate up to 8 blocks. To reach this maximum, each block must not use more than 2K bytes of shared memory; otherwise, the number of blocks that can reside in each SM is reduced such that the total amount of shared memory used by these blocks does not exceed 16K bytes. For instance, if each block uses 5K bytes of shared memory, no more than three blocks can be assigned to each SM.

For the matrix multiplication example, shared memory can become a limiting factor. For a tile size of  $16 \times 16$ , each block needs  $16 \times 16 \times 4=1\text{K}$  bytes of storage for `Mds`. (Note that each element is a float type, which is 4 bytes.) Another 1KB is needed for `Nds`. Thus, each block uses 2K bytes of shared memory. The 16K-byte shared memory allows

8 blocks to simultaneously reside in an SM. Since this is the same as the maximum allowed by the threading hardware, shared memory is not a limiting factor for this tile size. In this case, the real limitation is the threading hardware limitation that only allows 1536 threads in each SM. This constraint limits the number of blocks in each SM to six. Consequently, only  $6 * 2\text{KB} = 12\text{KB}$  of the shared memory will be used. These limits change from one device to another but can be determined at runtime with device queries.

The size of shared memory in each SM can also vary depending on the device. Each generation or model of device can have different amounts of shared memory in each SM. It is often desirable for a kernel to be able to use different amount of shared memory according to the amount available in the hardware. We may want a host code to dynamically determine the size of the shared memory and adjust the amount of shared memory used by a kernel, which can be done by calling the `cuda-GetDeviceProperties` function. We make the assumption that variable `&dev_prop` is passed to the function and that field `dev_prop.sharedMemPerBlock` gives the number of registers available in each SM. The programmer can then determine the amount of shared memory that should be used by each block.

Unfortunately, the kernel in Fig. 4.16 does not support this. The declarations used in Fig. 4.16 hardwire the size of its shared memory usage to a compile-time constant:

```
__shared__ float Mds[TILE_WIDTH][TILE_WIDTH];
__shared__ float Nds[TILE_WIDTH][TILE_WIDTH];
```

That is, the size of `Mds` and `Nds` is set to be `TILE_WIDTH2` elements, regardless of the value of `TILE_WIDTH` at compile-time. To illustrate, assume that the file contains

```
#define TILE_WIDTH 16.
```

Both `Mds` and `Nds` will have 256 elements. If we want to change the size of `Mds` and `Nds`, we change the value of `TILE_WIDTH` and recompile the code. The kernel cannot easily adjust its shared memory usage at runtime without recompilation.

We can enable such an adjustment with a different style of declaration in CUDA. We can add a C “extern” keyword in front of the shared memory declaration and omit the size of the array in the declaration. In this manner, the declarations for `Mds` and `Nds` read as

```
extern __shared__ Mds[];
extern __shared__ Nds[];
```

Note that the arrays are now one-dimensional. We will need to use a linearized index based on the vertical and horizontal indexes.

At runtime when we launch the kernel, we can dynamically determine the amount of shared memory to be used according to the device query result and supply that as a **third** configuration parameter to the kernel launch. The revised kernel could be launched with the following statements:

```
size_t size=
    calculate_appropriate_SM_usage(dev_prop.sharedMemPerBlock,...);
matrixMulKernel<<<dimGrid, dimBlock, size>>>(Md, Nd, Pd, Width);
```

where `size_t` is a built-in type for declaring a variable to hold the size information for dynamically allocated data structures. The size is expressed in bytes. In our matrix multiplication example, for a  $16 \times 16$  tile, we have a size of  $16 \times 16 \times 4 = 1024$  bytes. The details of the calculation for setting the value of `size` at run-time have been omitted.

---

## 4.8 SUMMARY

In summary, the execution speed of a program in modern processors can be severely limited by the speed of the memory. To achieve good utilization of the execution throughput of CUDA devices, a high compute-to-global-memory-access ratio in the kernel code should be obtained. If the ratio obtained is low, the kernel is memory-bound; i.e., its execution speed is limited by the rate at which its operands are accessed from memory.

CUDA defines registers, shared memory, and constant memory. These memories are much smaller than the global memory but can be accessed at much higher rates. Using these memories effectively requires a redesign of the algorithm. We use matrix multiplication to illustrate tiling, a widely used technique to enhance locality of data access and effectively use shared memory. In parallel programming, tiling forces multiple threads to jointly focus on a subset of the input data at each phase of execution so that the subset data can be placed into these special memory types, consequently increasing the access speed. We demonstrate that with  $16 \times 16$  tiling, global memory accesses are no longer the major limiting factor for matrix multiplication performance.

However, CUDA programmers need to be aware of the limited sizes of these types of memory. Their capacities are implementation-dependent. Once their capacities are exceeded, they limit the number of threads that can simultaneously execute in each SM. The ability to reason about hardware limitations when developing an application is a key aspect of computational thinking.

Although we introduced tiled algorithms in the context of CUDA programming, the technique is an effective strategy for achieving high-performance in virtually all types of parallel computing systems. The reason is that an application must exhibit locality in data access in order to effectively use high-speed memories in these systems. In a multicore CPU system, data locality allows an application to effectively use on-chip data caches to reduce memory access latency and achieve high-performance. Therefore, the reader will find the tiled algorithm useful when he/she develops a parallel application for other types of parallel computing systems using other programming models.

Our goal for this chapter is to introduce the concept of locality, tiling, and different CUDA memory types. We introduced a tiled matrix multiplication kernel by using shared memory. The use of registers and constant memory in tiling has yet to be discussed. The use of these memory types in tiled algorithms will be explained when parallel algorithm patterns are discussed.

---

## 4.9 EXERCISES

1. Consider matrix addition. Can one use shared memory to reduce the global memory bandwidth consumption? Hint: Analyze the elements accessed by each thread and see if there is any commonality between threads.
2. Draw the equivalent of Fig. 4.14 for an  $8 \times 8$  matrix multiplication with  $2 \times 2$  tiling and  $4 \times 4$  tiling. Verify that the reduction in global memory bandwidth is indeed proportional to the dimensions of the tiles.
3. What type of incorrect execution behavior can happen if one or both `__syncthreads()` are omitted in the kernel of Fig. 4.16?
4. Assuming that capacity is not an issue for registers or shared memory, give one important reason why it would be valuable to use shared memory instead of registers to hold values fetched from global memory? Explain your answer.
5. For our tiled matrix–matrix multiplication kernel, if we use a  $32 \times 32$  tile, what is the reduction of memory bandwidth usage for input matrices  $M$  and  $N$ ?
  - A. 1/8 of the original usage
  - B. 1/16 of the original usage
  - C. 1/32 of the original usage
  - D. 1/64 of the original usage
6. Assume that a CUDA kernel is launched with 1,000 thread blocks, with each having 512 threads. If a variable is declared as a local variable in the kernel, how many versions of the variable will be created through the lifetime of the execution of the kernel?
  - A. 1
  - B. 1000
  - C. 512
  - D. 512000
7. In the previous question, if a variable is declared as a shared memory variable, how many versions of the variable will be created throughout the lifetime of the execution of the kernel?
  - A. 1
  - B. 1000
  - C. 512
  - D. 51200
8. Consider performing a matrix multiplication of two input matrices with dimensions  $N \times N$ . How many times is each element in the input matrices requested from global memory in the following situations?
  - A. There is no tiling.
  - B. Tiles of size  $T \times T$  are used.

9. A kernel performs 36 floating-point operations and 7 32-bit word global memory accesses per thread. For each of the following device properties, indicate whether this kernel is compute- or memory-bound.
- A. Peak FLOPS= 200 GFLOPS, Peak Memory Bandwidth= 100 GB/s
  - B. Peak FLOPS= 300 GFLOPS, Peak Memory Bandwidth= 250 GB/s
10. To manipulate tiles, a new CUDA programmer has written the following device kernel, which will transpose each tile in a matrix. The tiles are of size `BLOCK_WIDTH` by `BLOCK_WIDTH`, and each of the dimensions of matrix `A` is known to be a multiple of `BLOCK_WIDTH`. The kernel invocation and code are shown below. `BLOCK_WIDTH` is known at compile time, but could be set anywhere from 1 to 20.

```
dim3 blockDim(BLOCK_WIDTH,BLOCK_WIDTH);
dim3 gridDim(A_width/blockDim.x,A_height/blockDim.y);
BlockTranspose<<<gridDim, blockDim>>>(A, A_width, A_height);
__global__ void
BlockTranspose(float* A_elements, int A_width, int A_height)
{
    __shared__ float blockA[BLOCK_WIDTH][BLOCK_WIDTH];
    int baseIdx=blockIdx.x * BLOCK_SIZE + threadIdx.x;
    baseIdx += (blockIdx.y * BLOCK_SIZE + threadIdx.y) * A_width;
    blockA[threadIdx.y][threadIdx.x]=A_elements[baseIdx];
    A_elements[baseIdx]=blockA[threadIdx.x][threadIdx.y];
}
```

- A. Out of the possible range of values for `BLOCK_SIZE`, for what values of `BLOCK_SIZE` will this kernel function execute correctly on the device?
- B. If the code does not execute correctly for all `BLOCK_SIZE` values, suggest a fix to the code to make it work for all `BLOCK_SIZE` values.

This page intentionally left blank





GPU Teaching Kit  
Accelerated Computing



# Module 4.1 – Memory and Data Locality

CUDA Memories

# Objective

- To learn to effectively use the CUDA memory types in a parallel program
  - Importance of memory access efficiency
  - Registers, shared memory, global memory
  - Scope and lifetime

# Review: Image Blur Kernel.

```
// Get the average of the surrounding 2xBLUR_SIZE x 2xBLUR_SIZE box
```

```
for(int blurRow = -BLUR_SIZE; blurRow < BLUR_SIZE+1; ++blurRow) {  
    for(int blurCol = -BLUR_SIZE; blurCol < BLUR_SIZE+1; ++blurCol) {
```

```
        int curRow = Row + blurRow;
```

```
        int curCol = Col + blurCol;
```

```
        // Verify we have a valid image pixel
```

```
        if(curRow > -1 && curRow < h && curCol > -1 && curCol < w) {
```

```
            pixVal += in[curRow * w + curCol];
```

```
            pixels++; // Keep track of number of pixels in the accumulated total
```

```
        }
```

```
    }
```

```
}
```


```
// Write our new pixel value out
```

```
out[Row * w + Col] = (unsigned char)(pixVal / pixels);
```

# How about performance on a GPU

- All threads access global memory for their input matrix elements
  - One memory accesses (4 bytes) per floating-point addition
  - 4B/s of memory bandwidth/FLOPS
- Assume a GPU with
  - Peak floating-point rate 1,500 GFLOPS with 200 GB/s DRAM bandwidth
  - $4 * 1,500 = 6,000$  GB/s required to achieve peak FLOPS rating
  - The 200 GB/s memory bandwidth limits the execution at 50 GFLOPS
- This limits the execution rate to 3.3% (50/1500) of the peak floating-point execution rate of the device!
- Need to drastically cut down memory accesses to get close to the 1,500 GFLOPS

# Example – Matrix Multiplication

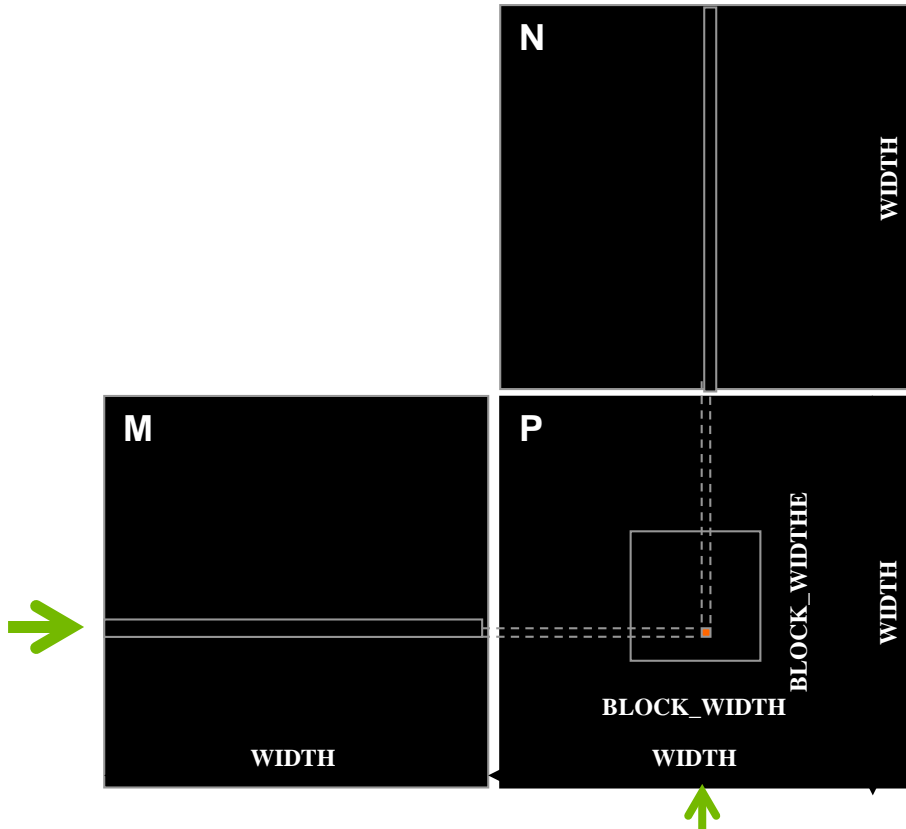


# A Basic Matrix Multiplication

```
__global__ void MatrixMulKernel(float* M, float* N, float* P, int Width) {  
    // Calculate the row index of the P element and M  
    int Row = blockIdx.y*blockDim.y+threadIdx.y;  
  
    // Calculate the column index of P and N  
    int Col = blockIdx.x*blockDim.x+threadIdx.x;  
  
    if ((Row < Width) && (Col < Width)) {  
        float Pvalue = 0;  
        // each thread computes one element of the block sub-matrix  
        for (int k = 0; k < Width; ++k) {  
            Pvalue += M[Row*Width+k]*N[k*Width+Col];  
        }  
        P[Row*Width+Col] = Pvalue;  
    }  
}
```

# Example – Matrix Multiplication


```
__global__ void MatrixMulKernel(float* M, float* N, float* P, int Width) {  
  
    // Calculate the row index of the P element and M  
    int Row = blockIdx.y*blockDim.y+threadIdx.y;  
  
    // Calculate the column index of P and N  
    int Col = blockIdx.x*blockDim.x+threadIdx.x;  
  
    if ((Row < Width) && (Col < Width)) {  
        float Pvalue = 0;  
        // each thread computes one element of the block sub-matrix  
        for (int k = 0; k < Width; ++k) {  
            Pvalue += M[Row*Width+k]*N[k*Width+Col];  
        }  
        P[Row*Width+Col] = Pvalue;  
    }  
}
```

# A Toy Example: Thread to P Data Mapping

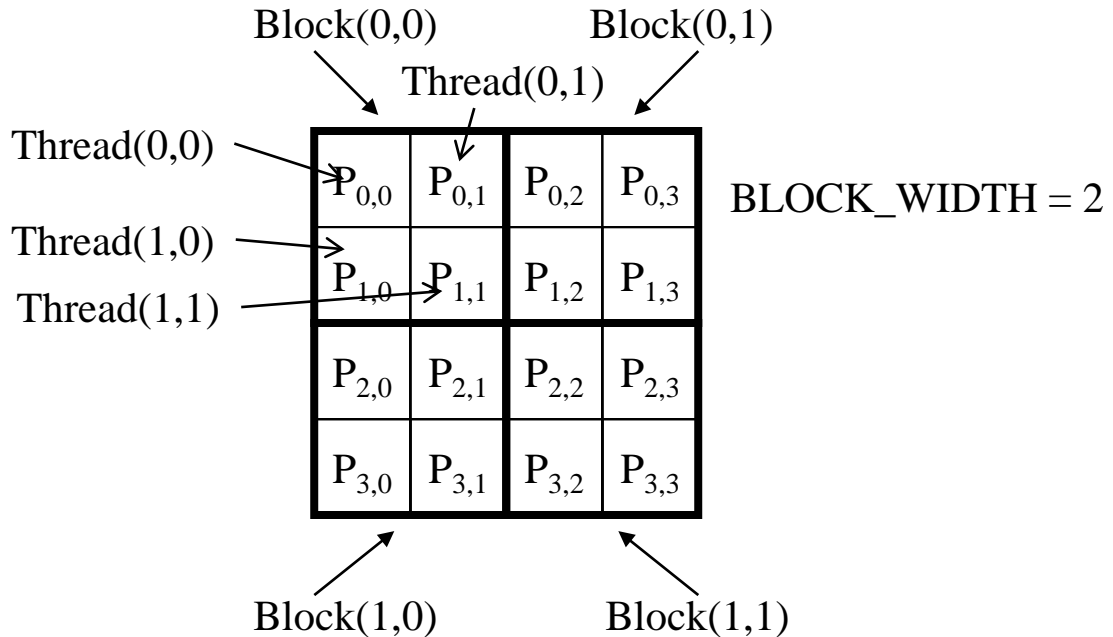





# Calculation of $P_{0,0}$ and $P_{0,1}$

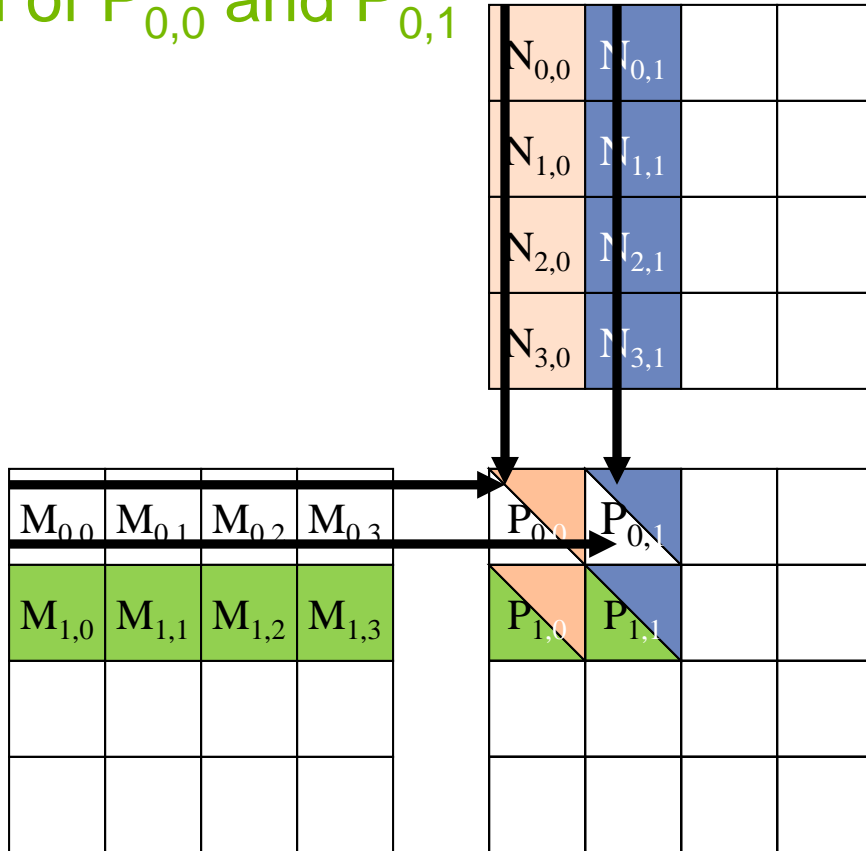

# Memory and Registers in the Von-Neumann Model

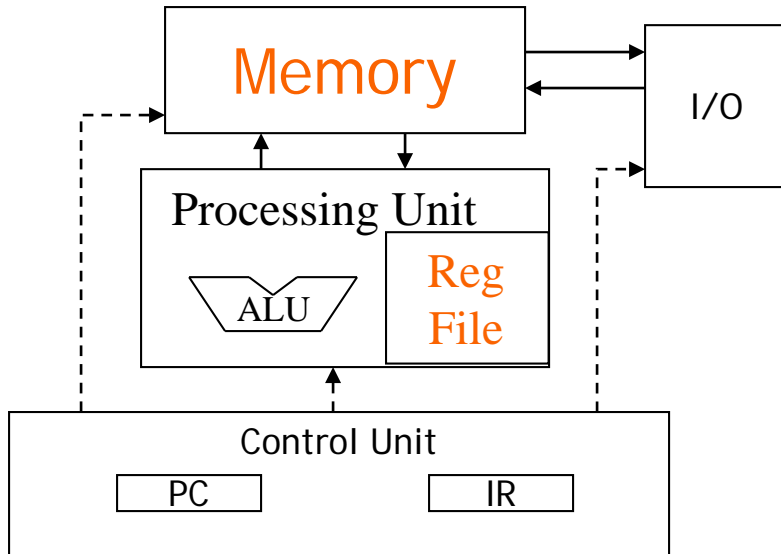

# Programmer View of CUDA Memories

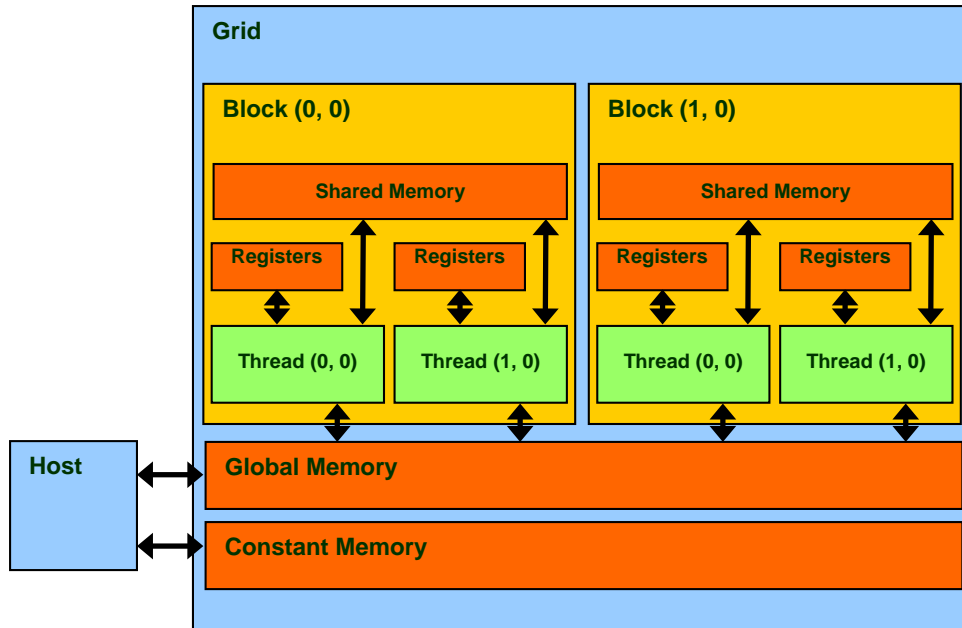

# Declaring CUDA Variables


Variable declaration	Memory	Scope	Lifetime
<code>int LocalVar;</code>	register	thread	thread
<code>__device__ __shared__ int SharedVar;</code>	shared	block	block
<code>__device__ int GlobalVar;</code>	global	grid	application
<code>__device__ __constant__ int ConstantVar;</code>	constant	grid	application

- `__device__` is optional when used with `__shared__`, or `__constant__`
- Automatic variables reside in a register
  - Except per-thread arrays that reside in global memory

# Example: Shared Memory Variable Declaration

```
void blurKernel(unsigned char * in, unsigned char * out, int w, int h)
{
    __shared__ float ds_in[TILE_WIDTH][TILE_WIDTH];
    ...
}
```


# Where to Declare Variables?

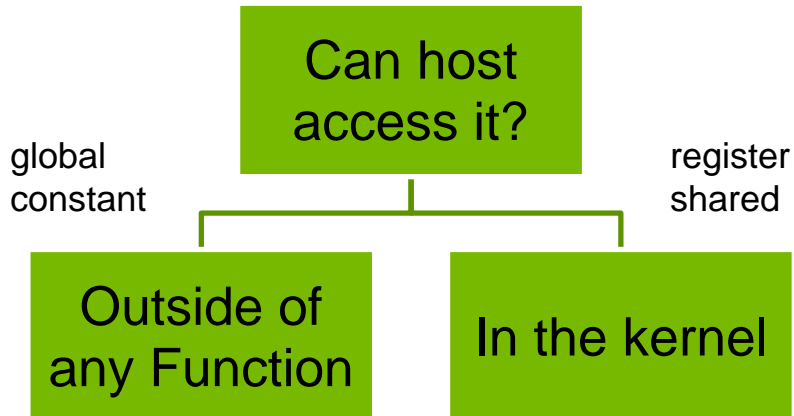

# Shared Memory in CUDA

- A special type of memory whose contents are explicitly defined and used in the kernel source code
  - One in each SM
  - Accessed at much higher speed (in both latency and throughput) than global memory
  - Scope of access and sharing - thread blocks
  - Lifetime – thread block, contents will disappear after the corresponding thread finishes terminates execution
  - Accessed by memory load/store instructions
  - A form of scratchpad memory in computer architecture

# Hardware View of CUDA Memories

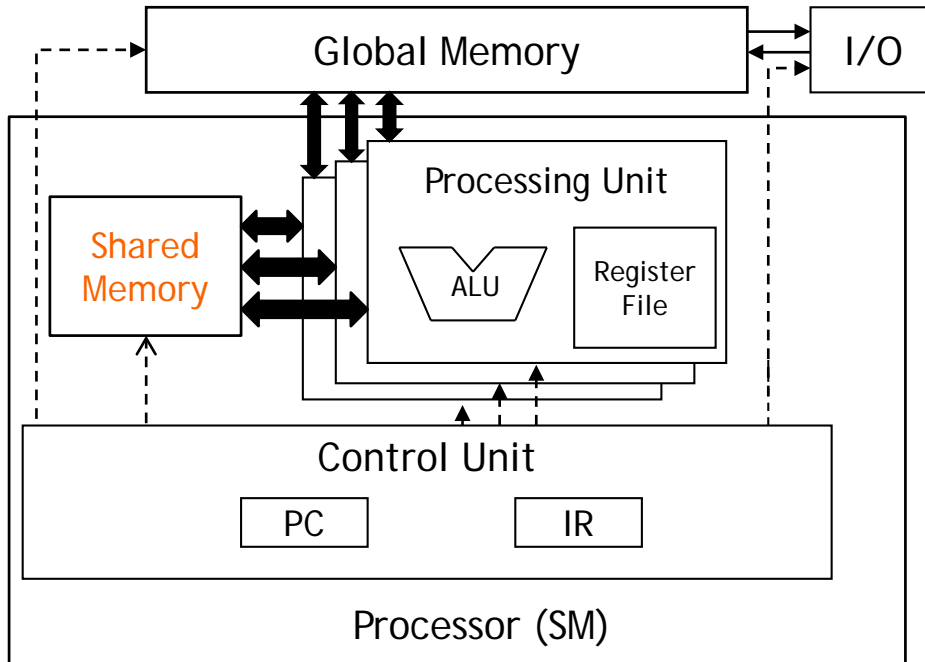





# GPU Teaching Kit

Accelerated Computing



The GPU Teaching Kit is licensed by NVIDIA and the University of Illinois under the [Creative Commons Attribution-NonCommercial 4.0 International License](https://creativecommons.org/licenses/by-nc/4.0/).



GPU Teaching Kit  
Accelerated Computing



## Module 4.2 – Memory and Data Locality


Tiled Parallel Algorithms

# Objective

- To understand the motivation and ideas for tiled parallel algorithms
  - Reducing the limiting effect of memory bandwidth on parallel kernel performance
  - Tiled algorithms and barrier synchronization


# Global Memory Access Pattern of the Basic Matrix Multiplication Kernel

Global Memory

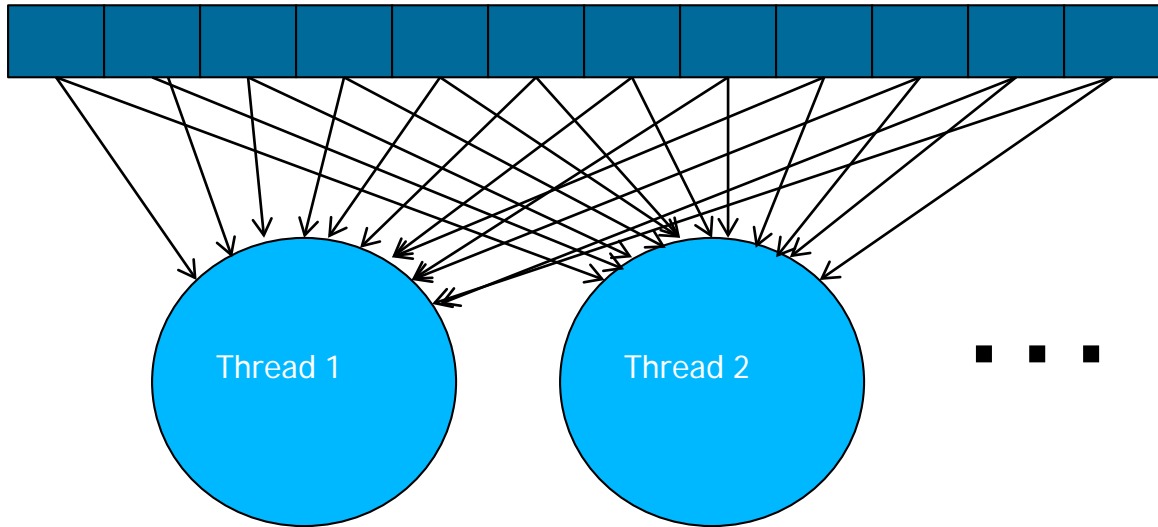

# Tiling/Blocking - Basic Idea

Global Memory

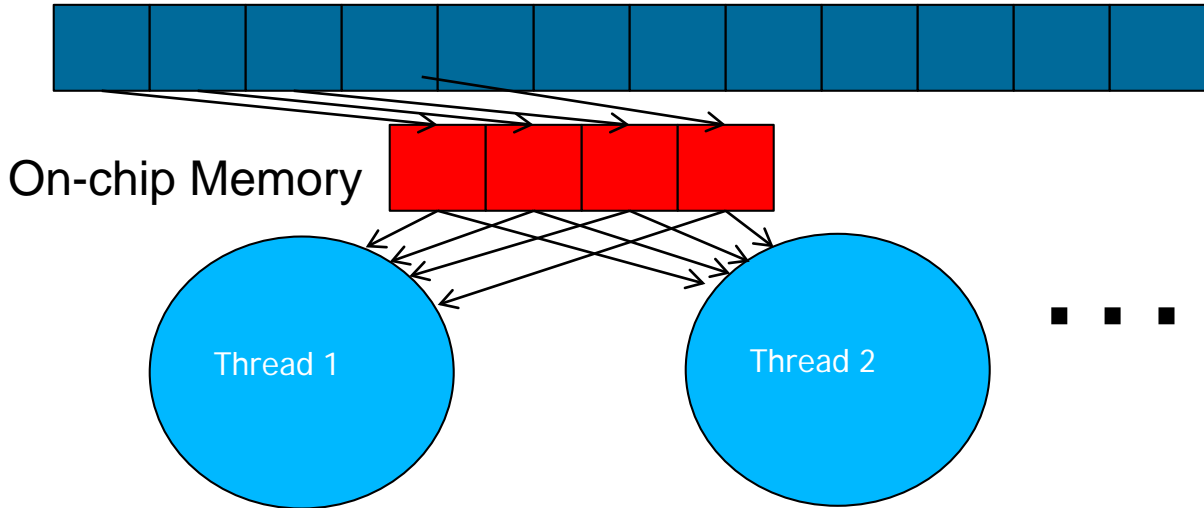

Divide the global memory content into tiles



Focus the computation of threads on one or a small number of tiles at each point in time

# Tiling/Blocking - Basic Idea

Global Memory



On-chip Memory



...

# Basic Concept of Tiling

- In a congested traffic system, significant reduction of vehicles can greatly improve the delay seen by all vehicles
  - Carpooling for commuters
  - Tiling for global memory accesses
    - drivers = threads accessing their memory data operands
    - cars = memory access requests



# Some Computations are More Challenging to Tile

- Some carpools may be easier than others
  - Car pool participants need to have similar work schedule
  - Some vehicles may be more suitable for carpooling
- Similar challenges exist in tiling






# Carpools need synchronization.

- Good: when people have similar schedule




# Carpools need synchronization.

- Bad: when people have very different schedule

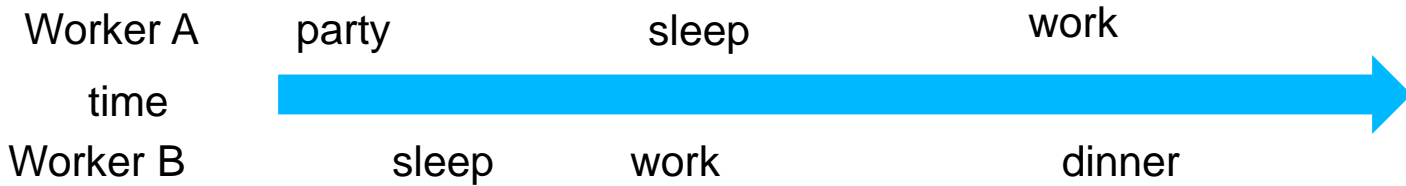


# Same with Tiling

- Good: when threads have similar access timing

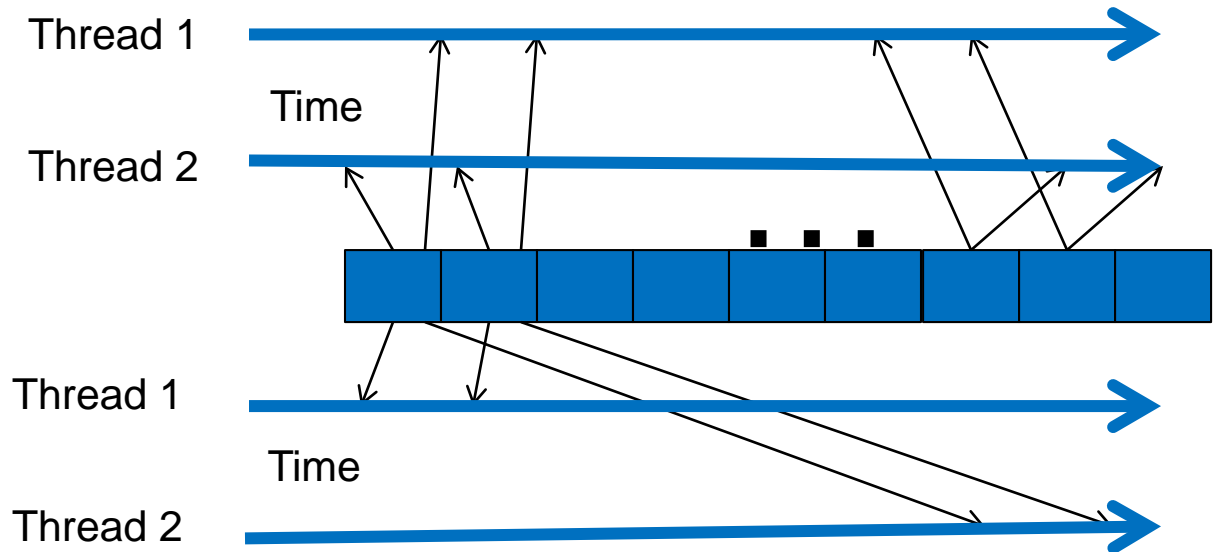

- Bad: when threads have very different timing

# Barrier Synchronization for Tiling

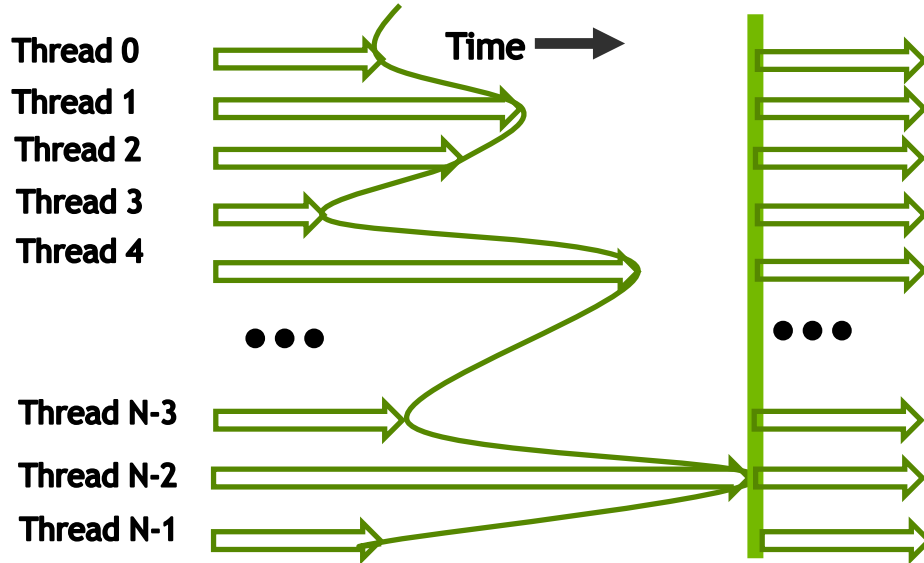

# Outline of Tiling Technique

- Identify a tile of global memory contents that are accessed by multiple threads
- Load the tile from global memory into on-chip memory
- Use barrier synchronization to make sure that all threads are ready to start the phase
- Have the multiple threads to access their data from the on-chip memory
- Use barrier synchronization to make sure that all threads have completed the current phase
- Move on to the next tile



# GPU Teaching Kit

Accelerated Computing



The GPU Teaching Kit is licensed by NVIDIA and the University of Illinois under the [Creative Commons Attribution-NonCommercial 4.0 International License](https://creativecommons.org/licenses/by-nc/4.0/).



GPU Teaching Kit  
Accelerated Computing



# Module 4.3 - Memory Model and Locality

Tiled Matrix Multiplication


# Objective

- To understand the design of a tiled parallel algorithm for matrix multiplication
  - Loading a tile
  - Phased execution
  - Barrier Synchronization




# Matrix Multiplication

- Data access pattern
  - Each thread - a row of M and a column of N
  - Each thread block - a strip of M and a strip of N

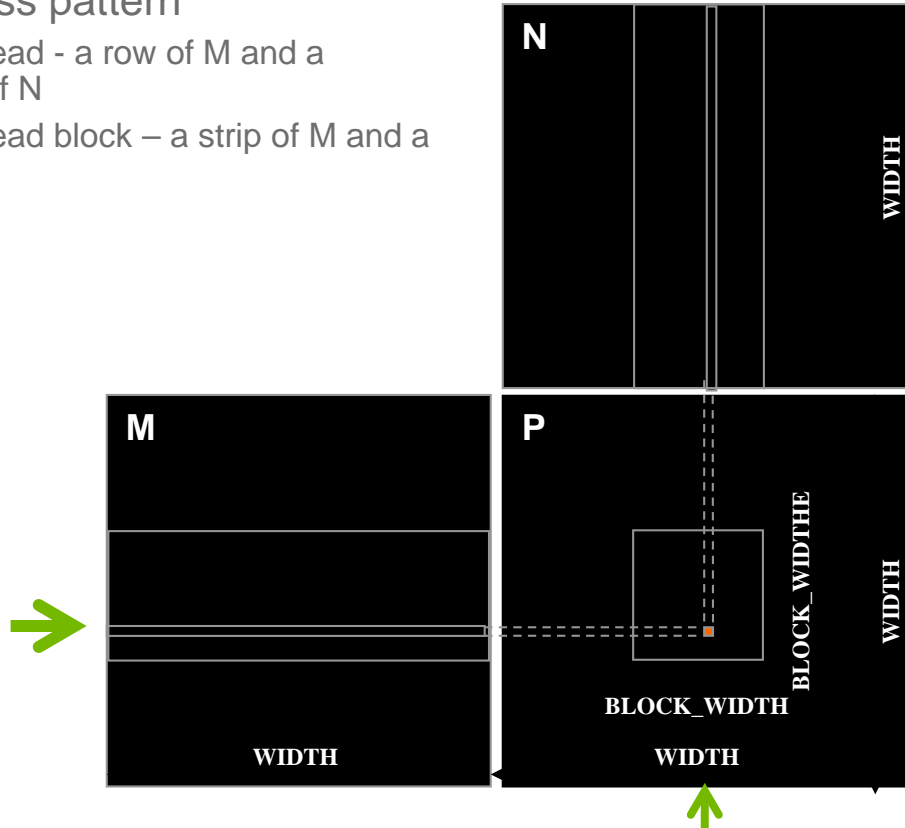

# Tiled Matrix Multiplication


- Break up the execution of each thread into phases
- so that the data accesses by the thread block in each phase are focused on one tile of M and one tile of N
- The tile is of `BLOCK_SIZE` elements in each dimension

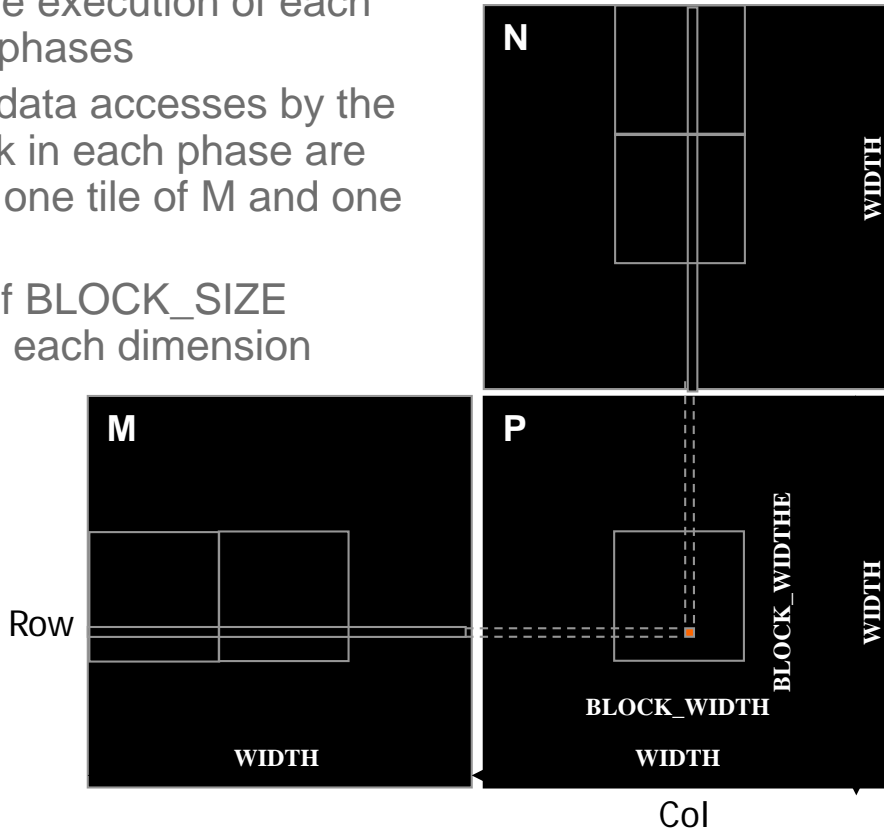

# Loading a Tile

- All threads in a block participate
  - Each thread loads one M element and one N element in tiled code

# Phase 0 Load for Block (0,0)

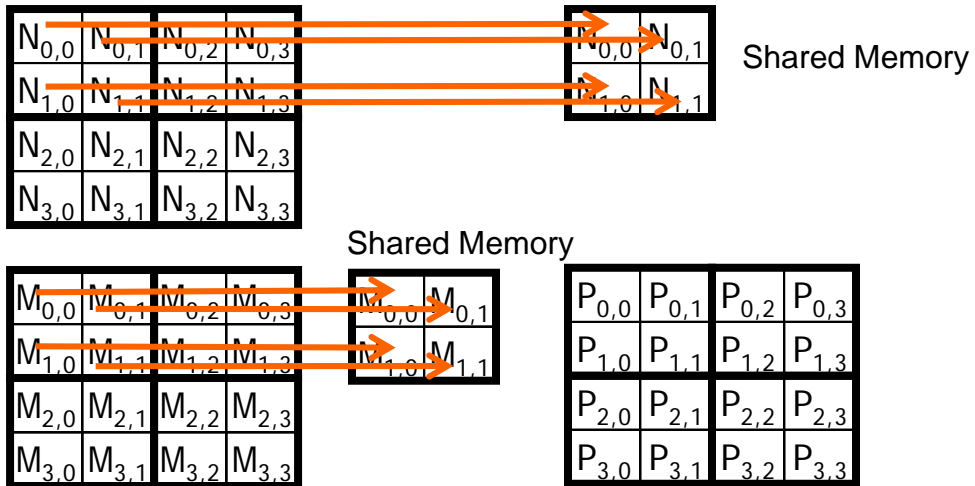

# Phase 0 Use for Block (0,0) (iteration 0)

$N_{0,0}$	$N_{0,1}$	$N_{0,2}$	$N_{0,3}$
$N_{1,0}$	$N_{1,1}$	$N_{1,2}$	$N_{1,3}$
$N_{2,0}$	$N_{2,1}$	$N_{2,2}$	$N_{2,3}$
$N_{3,0}$	$N_{3,1}$	$N_{3,2}$	$N_{3,3}$

$M_{0,0}$	$M_{0,1}$	$M_{0,2}$	$M_{0,3}$
$M_{1,0}$	$M_{1,1}$	$M_{1,2}$	$M_{1,3}$
$M_{2,0}$	$M_{2,1}$	$M_{2,2}$	$M_{2,3}$
$M_{3,0}$	$M_{3,1}$	$M_{3,2}$	$M_{3,3}$

$N_{0,0}$	$N_{0,1}$
$N_{1,0}$	$N_{1,1}$

Shared Memory

Shared Memory

$M_{0,0}$	$M_{0,1}$
$M_{1,0}$	$M_{1,1}$

$P_{0,0}$	$P_{0,1}$	$P_{0,2}$	$P_{0,3}$
$P_{1,0}$	$P_{1,1}$	$P_{1,2}$	$P_{1,3}$
$P_{2,0}$	$P_{2,1}$	$P_{2,2}$	$P_{2,3}$
$P_{3,0}$	$P_{3,1}$	$P_{3,2}$	$P_{3,3}$

# Phase 0 Use for Block (0,0) (iteration 1)

$N_{0,0}$	$N_{0,1}$	$N_{0,2}$	$N_{0,3}$
$N_{1,0}$	$N_{1,1}$	$N_{1,2}$	$N_{1,3}$
$N_{2,0}$	$N_{2,1}$	$N_{2,2}$	$N_{2,3}$
$N_{3,0}$	$N_{3,1}$	$N_{3,2}$	$N_{3,3}$

$M_{0,0}$	$M_{0,1}$	$M_{0,2}$	$M_{0,3}$
$M_{1,0}$	$M_{1,1}$	$M_{1,2}$	$M_{1,3}$
$M_{2,0}$	$M_{2,1}$	$M_{2,2}$	$M_{2,3}$
$M_{3,0}$	$M_{3,1}$	$M_{3,2}$	$M_{3,3}$

$N_{0,0}$	$N_{0,1}$
$N_{1,0}$	$N_{1,1}$


Shared Memory

Shared Memory

$M_{0,0}$	$M_{0,1}$
$M_{1,0}$	$M_{1,1}$

$P_{0,0}$	$P_{0,1}$	$P_{0,2}$	$P_{0,3}$
$P_{1,0}$	$P_{1,1}$	$P_{1,2}$	$P_{1,3}$
$P_{2,0}$	$P_{2,1}$	$P_{2,2}$	$P_{2,3}$
$P_{3,0}$	$P_{3,1}$	$P_{3,2}$	$P_{3,3}$


# Phase 1 Load for Block (0,0)

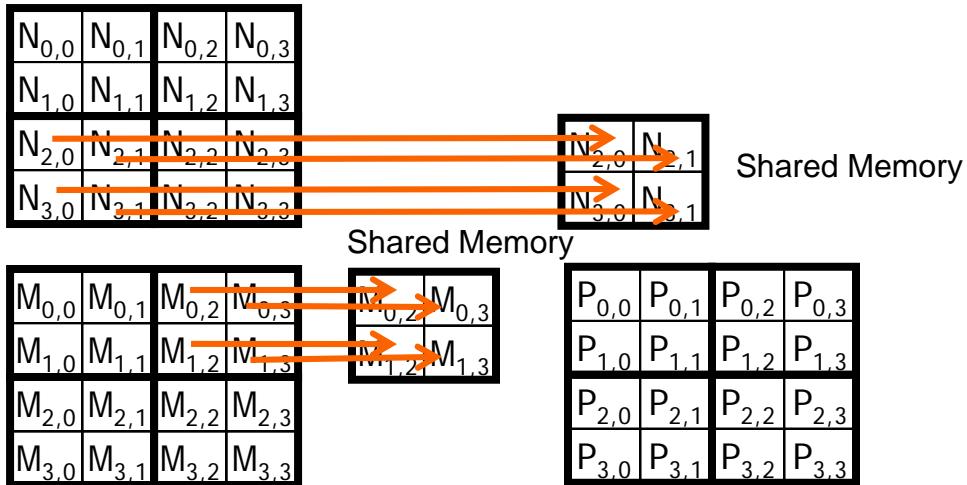

# Phase 1 Use for Block (0,0) (iteration 0)

$N_{0,0}$	$N_{0,1}$	$N_{0,2}$	$N_{0,3}$
$N_{1,0}$	$N_{1,1}$	$N_{1,2}$	$N_{1,3}$
$N_{2,0}$	$N_{2,1}$	$N_{2,2}$	$N_{2,3}$
$N_{3,0}$	$N_{3,1}$	$N_{3,2}$	$N_{3,3}$

$M_{0,0}$	$M_{0,1}$	$M_{0,2}$	$M_{0,3}$
$M_{1,0}$	$M_{1,1}$	$M_{1,2}$	$M_{1,3}$
$M_{2,0}$	$M_{2,1}$	$M_{2,2}$	$M_{2,3}$
$M_{3,0}$	$M_{3,1}$	$M_{3,2}$	$M_{3,3}$

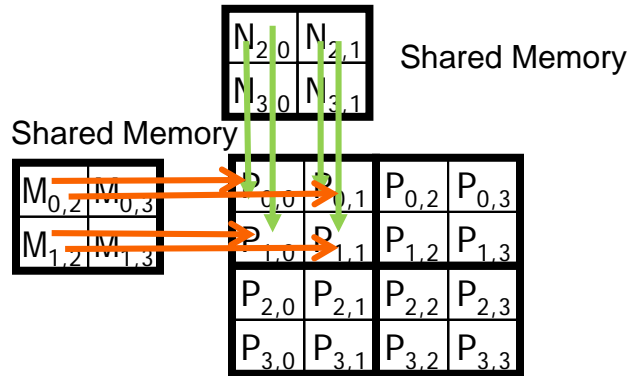




# Phase 1 Use for Block (0,0) (iteration 1)

$N_{0,0}$	$N_{0,1}$	$N_{0,2}$	$N_{0,3}$
$N_{1,0}$	$N_{1,1}$	$N_{1,2}$	$N_{1,3}$
$N_{2,0}$	$N_{2,1}$	$N_{2,2}$	$N_{2,3}$
$N_{3,0}$	$N_{3,1}$	$N_{3,2}$	$N_{3,3}$

$M_{0,0}$	$M_{0,1}$	$M_{0,2}$	$M_{0,3}$
$M_{1,0}$	$M_{1,1}$	$M_{1,2}$	$M_{1,3}$
$M_{2,0}$	$M_{2,1}$	$M_{2,2}$	$M_{2,3}$
$M_{3,0}$	$M_{3,1}$	$M_{3,2}$	$M_{3,3}$

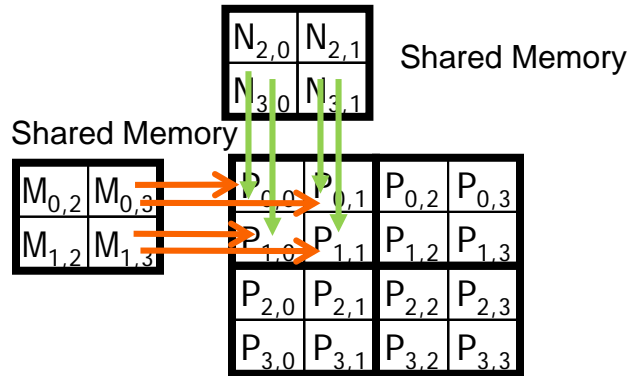

# Execution Phases of Toy Example

	Phase 0			Phase 1		
thread <sub>0,0</sub>	<b>M<sub>0,0</sub></b> ↓ Mds <sub>0,0</sub>	<b>N<sub>0,0</sub></b> ↓ Nds <sub>0,0</sub>	PValue <sub>0,0</sub> += Mds <sub>0,0</sub> *Nds <sub>0,0</sub> + Mds <sub>0,1</sub> *Nds <sub>1,0</sub>	<b>M<sub>0,2</sub></b> ↓ Mds <sub>0,0</sub>	<b>N<sub>2,0</sub></b> ↓ Nds <sub>0,0</sub>	PValue <sub>0,0</sub> += Mds <sub>0,0</sub> *Nds <sub>0,0</sub> + Mds <sub>0,1</sub> *Nds <sub>1,0</sub>
thread <sub>0,1</sub>	<b>M<sub>0,1</sub></b> ↓ Mds <sub>0,1</sub>	<b>N<sub>0,1</sub></b> ↓ Nds <sub>1,0</sub>	PValue <sub>0,1</sub> += Mds <sub>0,0</sub> *Nds <sub>0,1</sub> + Mds <sub>0,1</sub> *Nds <sub>1,1</sub>	<b>M<sub>0,3</sub></b> ↓ Mds <sub>0,1</sub>	<b>N<sub>2,1</sub></b> ↓ Nds <sub>0,1</sub>	PValue <sub>0,1</sub> += Mds <sub>0,0</sub> *Nds <sub>0,1</sub> + Mds <sub>0,1</sub> *Nds <sub>1,1</sub>
thread <sub>1,0</sub>	<b>M<sub>1,0</sub></b> ↓ Mds <sub>1,0</sub>	<b>N<sub>1,0</sub></b> ↓ Nds <sub>1,0</sub>	PValue <sub>1,0</sub> += Mds <sub>1,0</sub> *Nds <sub>0,0</sub> + Mds <sub>1,1</sub> *Nds <sub>1,0</sub>	<b>M<sub>1,2</sub></b> ↓ Mds <sub>1,0</sub>	<b>N<sub>3,0</sub></b> ↓ Nds <sub>1,0</sub>	PValue <sub>1,0</sub> += Mds <sub>1,0</sub> *Nds <sub>0,0</sub> + Mds <sub>1,1</sub> *Nds <sub>1,0</sub>
thread <sub>1,1</sub>	<b>M<sub>1,1</sub></b> ↓ Mds <sub>1,1</sub>	<b>N<sub>1,1</sub></b> ↓ Nds <sub>1,1</sub>	PValue <sub>1,1</sub> += Mds <sub>1,0</sub> *Nds <sub>0,1</sub> + Mds <sub>1,1</sub> *Nds <sub>1,1</sub>	<b>M<sub>1,3</sub></b> ↓ Mds <sub>1,1</sub>	<b>N<sub>3,1</sub></b> ↓ Nds <sub>1,1</sub>	PValue <sub>1,1</sub> += Mds <sub>1,0</sub> *Nds <sub>0,1</sub> + Mds <sub>1,1</sub> *Nds <sub>1,1</sub>

time →

# Execution Phases of Toy Example (cont.)

	Phase 0			Phase 1		
thread <sub>0,0</sub>	$\mathbf{M}_{0,0}$ ↓ $\text{Mds}_{0,0}$	$\mathbf{N}_{0,0}$ ↓ $\text{Nds}_{0,0}$	$\text{PValue}_{0,0} +=$ $\text{Mds}_{0,0} * \text{Nds}_{0,0} +$ $\text{Mds}_{0,1} * \text{Nds}_{1,0}$	$\mathbf{M}_{0,2}$ ↓ $\text{Mds}_{0,0}$	$\mathbf{N}_{2,0}$ ↓ $\text{Nds}_{0,0}$	$\text{PValue}_{0,0} +=$ $\text{Mds}_{0,0} * \text{Nds}_{0,0} +$ $\text{Mds}_{0,1} * \text{Nds}_{1,0}$
thread <sub>0,1</sub>	$\mathbf{M}_{0,1}$ ↓ $\text{Mds}_{0,1}$	$\mathbf{N}_{0,1}$ ↓ $\text{Nds}_{1,0}$	$\text{PValue}_{0,1} +=$ $\text{Mds}_{0,0} * \text{Nds}_{0,1} +$ $\text{Mds}_{0,1} * \text{Nds}_{1,1}$	$\mathbf{M}_{0,3}$ ↓ $\text{Mds}_{0,1}$	$\mathbf{N}_{2,1}$ ↓ $\text{Nds}_{0,1}$	$\text{PValue}_{0,1} +=$ $\text{Mds}_{0,0} * \text{Nds}_{0,1} +$ $\text{Mds}_{0,1} * \text{Nds}_{1,1}$
thread <sub>1,0</sub>	$\mathbf{M}_{1,0}$ ↓ $\text{Mds}_{1,0}$	$\mathbf{N}_{1,0}$ ↓ $\text{Nds}_{1,0}$	$\text{PValue}_{1,0} +=$ $\text{Mds}_{1,0} * \text{Nds}_{0,0} +$ $\text{Mds}_{1,1} * \text{Nds}_{1,0}$	$\mathbf{M}_{1,2}$ ↓ $\text{Mds}_{1,0}$	$\mathbf{N}_{3,0}$ ↓ $\text{Nds}_{1,0}$	$\text{PValue}_{1,0} +=$ $\text{Mds}_{1,0} * \text{Nds}_{0,0} +$ $\text{Mds}_{1,1} * \text{Nds}_{1,0}$
thread <sub>1,1</sub>	$\mathbf{M}_{1,1}$ ↓ $\text{Mds}_{1,1}$	$\mathbf{N}_{1,1}$ ↓ $\text{Nds}_{1,1}$	$\text{PValue}_{1,1} +=$ $\text{Mds}_{1,0} * \text{Nds}_{0,1} +$ $\text{Mds}_{1,1} * \text{Nds}_{1,1}$	$\mathbf{M}_{1,3}$ ↓ $\text{Mds}_{1,1}$	$\mathbf{N}_{3,1}$ ↓ $\text{Nds}_{1,1}$	$\text{PValue}_{1,1} +=$ $\text{Mds}_{1,0} * \text{Nds}_{0,1} +$ $\text{Mds}_{1,1} * \text{Nds}_{1,1}$

time →

Shared memory allows each value to be accessed by multiple threads

# Barrier Synchronization

- Synchronize all threads in a block
  - `__syncthreads()`
- All threads in the same block must reach the `__syncthreads()` before any of them can move on
- Best used to coordinate the phased execution tiled algorithms
  - To ensure that all elements of a tile are loaded at the beginning of a phase
  - To ensure that all elements of a tile are consumed at the end of a phase



# GPU Teaching Kit

Accelerated Computing



The GPU Teaching Kit is licensed by NVIDIA and the University of Illinois under the [Creative Commons Attribution-NonCommercial 4.0 International License](https://creativecommons.org/licenses/by-nc/4.0/).



GPU Teaching Kit  
Accelerated Computing



# Module 4.4 - Memory and Data Locality

Tiled Matrix Multiplication Kernel

# Objective


- To learn to write a tiled matrix-multiplication kernel
  - Loading and using tiles for matrix multiplication
  - Barrier synchronization, shared memory
  - Resource Considerations
  - Assume that Width is a multiple of tile size for simplicity

# Loading Input Tile 0 of M (Phase 0)

- Have each thread load an M element and an N element at the same relative position as its P element.

```
int Row = by * blockDim.y + ty;  
int Col = bx * blockDim.x + tx;  
2D indexing for accessing Tile 0:
```

```
M[Row][tx]  
N[ty][Col]
```

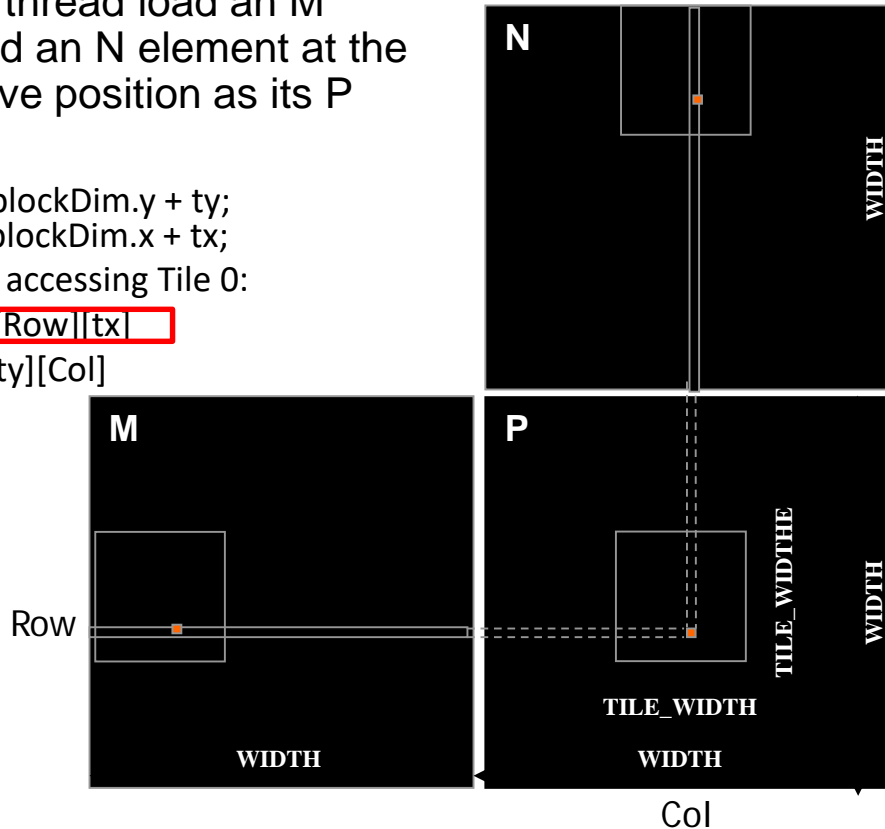



# Loading Input Tile 0 of N (Phase 0)


- Have each thread load an M element and an N element at the same relative position as its P element.

```
int Row = by * blockDim.y + ty;  
int Col = bx * blockDim.x + tx;
```

2D indexing for accessing Tile 0:

M[Row][tx]


N[ty][Col]

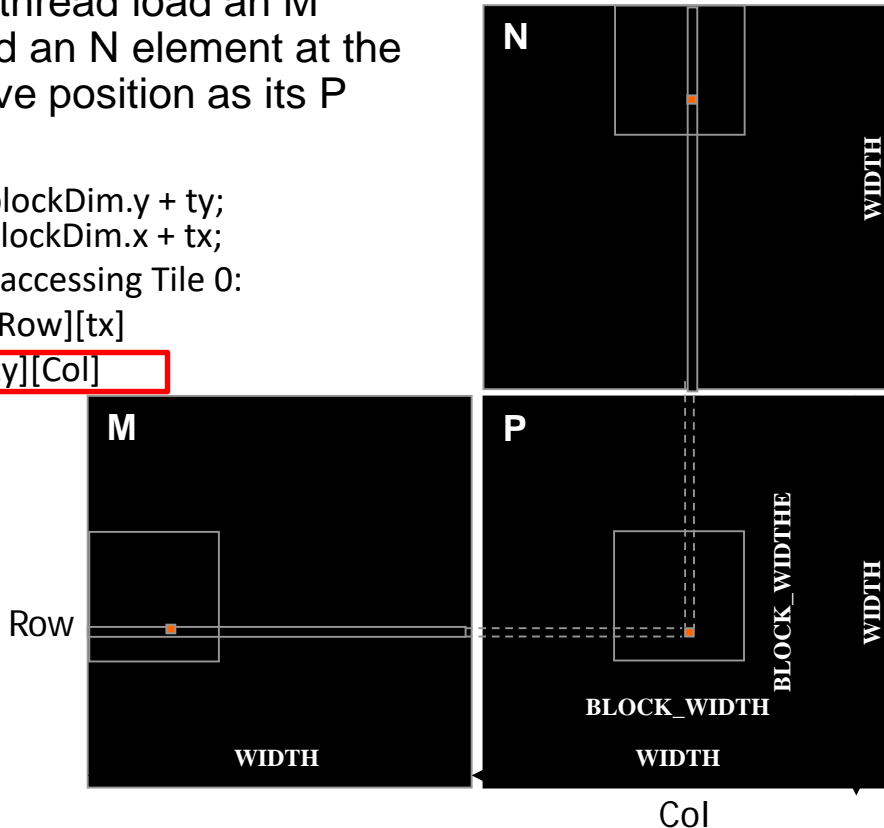

# Loading Input Tile 1 of M (Phase 1)

2D indexing for accessing Tile 1:


```
M[Row][1*TILE_WIDTH + tx]  
N[1*TILE*WIDTH + ty][Col]
```

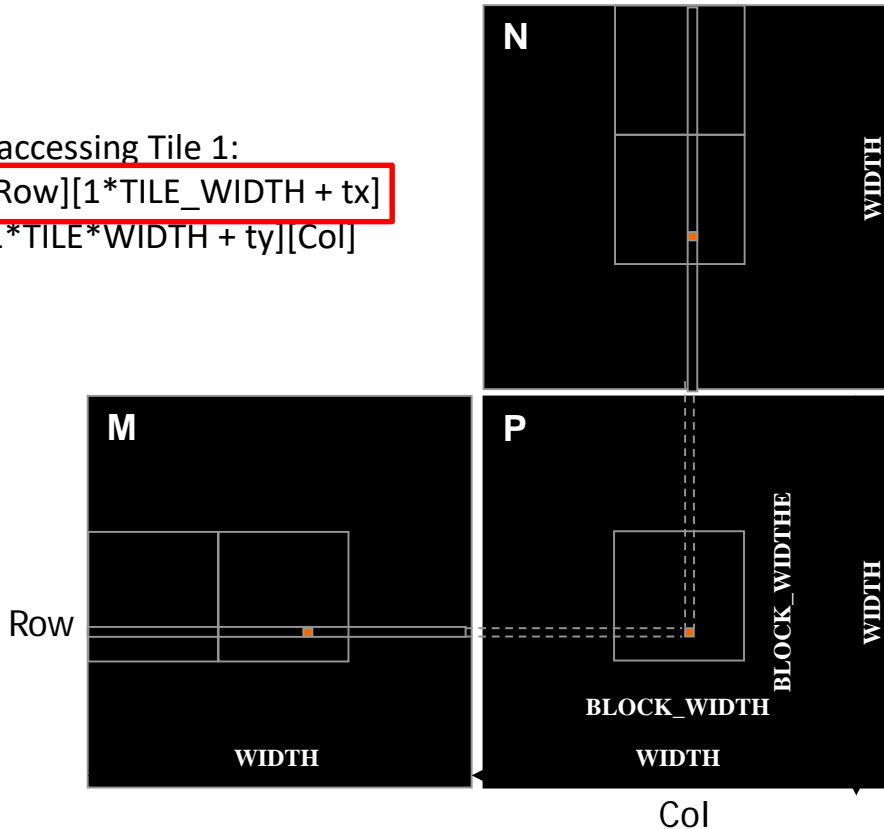

# Loading Input Tile 1 of N (Phase 1)

2D indexing for accessing Tile 1:

```
M[Row][1*TILE_WIDTH + tx]  
N[1*TILE*WIDTH + ty][Col]
```

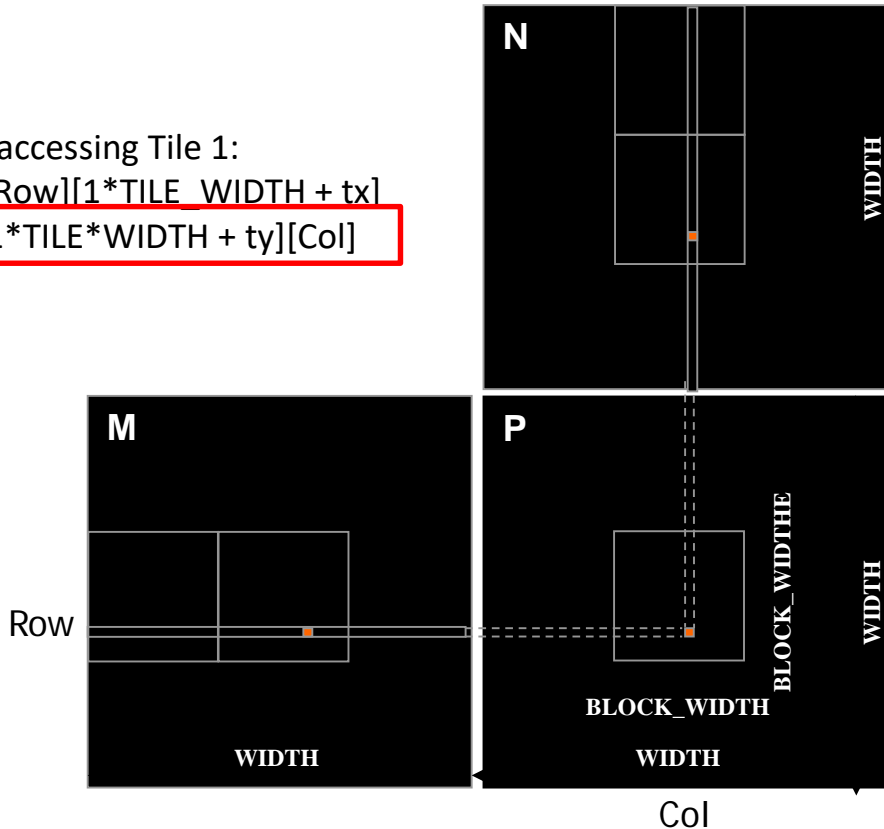

# M and N are dynamically allocated - use 1D indexing

→  $M[\text{Row}][p * \text{TILE\_WIDTH} + tx]$   
→  $M[\text{Row} * \text{Width} + p * \text{TILE\_WIDTH} + tx]$

→  $N[p * \text{TILE\_WIDTH} + ty][\text{Col}]$   
→  $N[(p * \text{TILE\_WIDTH} + ty) * \text{Width} + \text{Col}]$

where p is the sequence number of the current phase

# Tiled Matrix Multiplication Kernel

```
__global__ void MatrixMulKernel(float* M, float* N, float* P, Int Width)
{
```

```
    __shared__ float ds_M[TILE_WIDTH][TILE_WIDTH];
```

```
    __shared__ float ds_N[TILE_WIDTH][TILE_WIDTH];
```

```
    int bx = blockIdx.x;  int by = blockIdx.y;
```

```
    int tx = threadIdx.x; int ty = threadIdx.y;
```

```
    int Row = by * blockDim.y + ty;
```

```
    int Col = bx * blockDim.x + tx;
```

```
    float Pvalue = 0;
```

```
    // Loop over the M and N tiles required to compute the P element
```

```
    for (int p = 0; p < n/TILE_WIDTH; ++p) {
```

```
        // Collaborative loading of M and N tiles into shared memory
```

```
        ds_M[ty][tx] = M[Row*Width + p*TILE_WIDTH+tx];
```

```
        ds_N[ty][tx] = N[(t*TILE_WIDTH+ty)*Width + Col];
```

```
        __syncthreads();
```

```
        for (int i = 0; i < TILE_WIDTH; ++i) Pvalue += ds_M[ty][i] * ds_N[i][tx];
```

```
        __syncthreads();
```

```
    }
```

```
    P[Row*Width+Col] = Pvalue;
```

```
}
```

# Tiled Matrix Multiplication Kernel

```
__global__ void MatrixMulKernel(float* M, float* N, float* P, Int Width)
{
    __shared__ float ds_M[TILE_WIDTH][TILE_WIDTH];
    __shared__ float ds_N[TILE_WIDTH][TILE_WIDTH];

    int bx = blockIdx.x;  int by = blockIdx.y;
    int tx = threadIdx.x; int ty = threadIdx.y;

    int Row = by * blockDim.y + ty;
    int Col = bx * blockDim.x + tx;
    float Pvalue = 0;

    // Loop over the M and N tiles required to compute the P element
    for (int p = 0; p < n/TILE_WIDTH; ++p) {
        // Collaborative loading of M and N tiles into shared memory
        ds_M[ty][tx] = M[Row*Width + p*TILE_WIDTH+tx];
        ds_N[ty][tx] = N[(t*TILE_WIDTH+ty)*Width + Col];
        __syncthreads();

        for (int i = 0; i < TILE_WIDTH; ++i) Pvalue += ds_M[ty][i] * ds_N[i][tx];
        __syncthreads();
    }
    P[Row*Width+Col] = Pvalue;
}
```

# Tiled Matrix Multiplication Kernel

```
__global__ void MatrixMulKernel(float* M, float* N, float* P, Int Width)
{
    __shared__ float ds_M[TILE_WIDTH][TILE_WIDTH];
    __shared__ float ds_N[TILE_WIDTH][TILE_WIDTH];

    int bx = blockIdx.x;  int by = blockIdx.y;
    int tx = threadIdx.x; int ty = threadIdx.y;

    int Row = by * blockDim.y + ty;
    int Col = bx * blockDim.x + tx;
    float Pvalue = 0;

    // Loop over the M and N tiles required to compute the P element
    for (int p = 0; p < n/TILE_WIDTH; ++p) {
        // Collaborative loading of M and N tiles into shared memory
        ds_M[ty][tx] = M[Row*Width + p*TILE_WIDTH+tx];
        ds_N[ty][tx] = N[(t*TILE_WIDTH+ty)*Width + Col];
        __syncthreads();

        for (int i = 0; i < TILE_WIDTH; ++i) Pvalue += ds_M[ty][i] * ds_N[i][tx];
        __syncthreads();
    }
    P[Row*Width+Col] = Pvalue;
}
```

# Tile (Thread Block) Size Considerations

- Each **thread block** should have many threads
  - TILE\_WIDTH of 16 gives  $16*16 = 256$  threads
  - TILE\_WIDTH of 32 gives  $32*32 = 1024$  threads
- For 16, in each phase, each block performs  $2*256 = 512$  float loads from global memory for  $256 * (2*16) = 8,192$  mul/add operations. (16 floating-point operations for each memory load)
- For 32, in each phase, each block performs  $2*1024 = 2048$  float loads from global memory for  $1024 * (2*32) = 65,536$  mul/add operations. (32 floating-point operation for each memory load)



# Shared Memory and Threading

- For an SM with 16KB shared memory
  - Shared memory size is implementation dependent!
  - For `TILE_WIDTH = 16`, each thread block uses  $2 * 256 * 4B = 2KB$  of shared memory.
  - For 16KB shared memory, one can potentially have up to 8 thread blocks executing
    - This allows up to  $8 * 512 = 4,096$  pending loads. (2 per thread, 256 threads per block)
    - The next `TILE_WIDTH 32` would lead to  $2 * 32 * 32 * 4 \text{ Byte} = 8K \text{ Byte}$  shared memory usage per thread block, allowing 2 thread blocks active at the same time
      - However, in a GPU where the thread count is limited to 1536 threads per SM, the number of blocks per SM is reduced to one!
- Each `__syncthread()` can reduce the number of active threads for a block
  - More thread blocks can be advantageous



# GPU Teaching Kit

Accelerated Computing



The GPU Teaching Kit is licensed by NVIDIA and the University of Illinois under the [Creative Commons Attribution-NonCommercial 4.0 International License](https://creativecommons.org/licenses/by-nc/4.0/).



GPU Teaching Kit  
Accelerated Computing



## Module 4.5 - Memory and Data Locality

Handling Arbitrary Matrix Sizes in Tiled Algorithms


# Objective

- To learn to handle arbitrary matrix sizes in tiled matrix multiplication
  - Boundary condition checking
  - Regularizing tile contents
  - Rectangular matrices

# Handling Matrix of Arbitrary Size

- The tiled matrix multiplication kernel we presented so far can handle only square matrices whose dimensions (Width) are multiples of the tile width (TILE\_WIDTH)
  - However, real applications need to handle arbitrary sized matrices.
  - One could pad (add elements to) the rows and columns into multiples of the tile size, but would have significant space and data transfer time overhead.
- We will take a different approach.


# Phase 1 Loads for Block (0,0) for a 3x3 Example

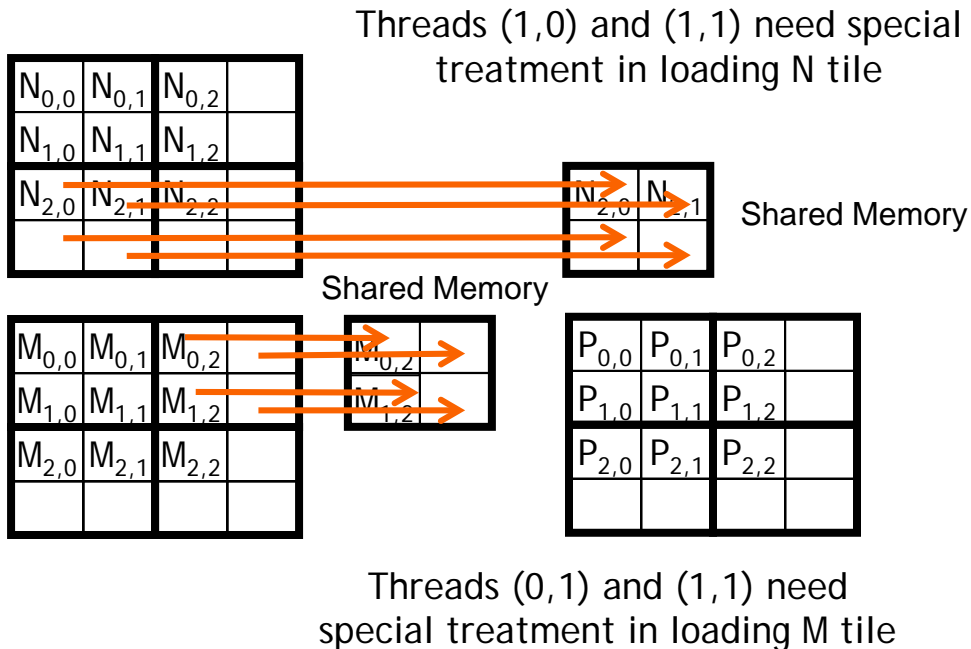


# Phase 1 Use for Block (0,0) (iteration 0)

$N_{0,0}$	$N_{0,1}$	$N_{0,2}$	
$N_{1,0}$	$N_{1,1}$	$N_{1,2}$	
$N_{2,0}$	$N_{2,1}$	$N_{2,2}$	

$M_{0,0}$	$M_{0,1}$	$M_{0,2}$	
$M_{1,0}$	$M_{1,1}$	$M_{1,2}$	
$M_{2,0}$	$M_{2,1}$	$M_{2,2}$	

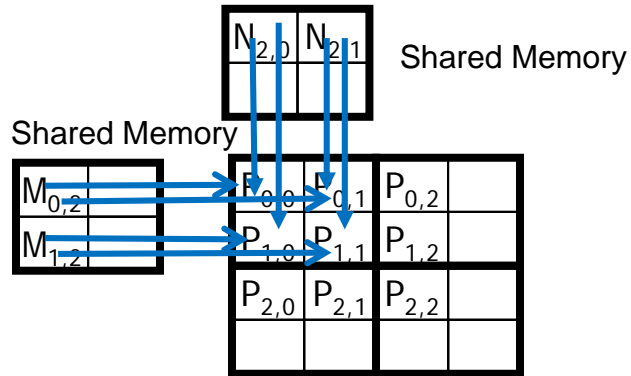

# Phase 1 Use for Block (0,0) (iteration 1)


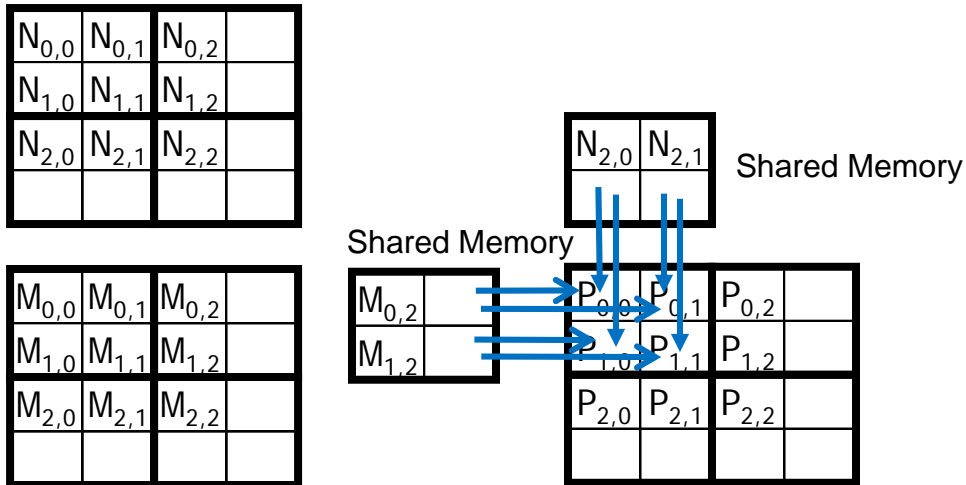


All Threads need special treatment. None of them should introduce invalidate contributions to their P elements.



# Phase 0 Loads for Block (1,1) for a 3x3 Example

Threads (0,1) and (1,1) need special treatment in loading N tile

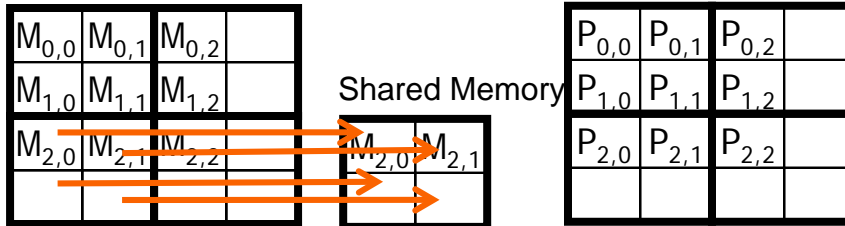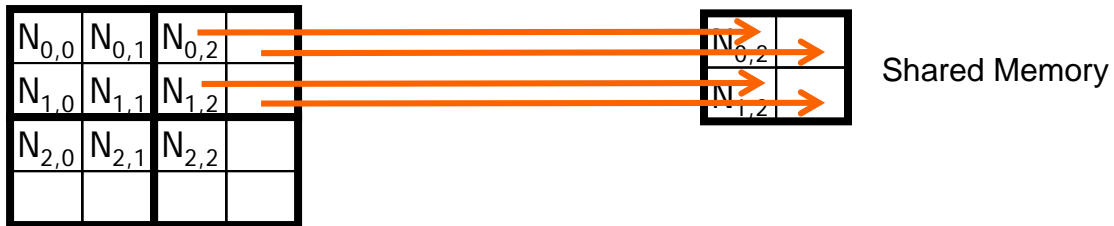

Threads (1,0) and (1,1) need special treatment in loading M tile

# Major Cases in Toy Example

- Threads that do not calculate valid P elements but still need to participate in loading the input tiles
  - Phase 0 of Block(1,1), Thread(1,0), assigned to calculate non-existent P[3,2] but need to participate in loading tile element N[1,2]
- Threads that calculate valid P elements may attempt to load non-existing input elements when loading input tiles
  - Phase 0 of Block(0,0), Thread(1,0), assigned to calculate valid P[1,0] but attempts to load non-existing N[3,0]


# A “Simple” Solution

- When a thread is to load any input element, test if it is in the valid index range
  - If valid, proceed to load
  - Else, do not load, just write a 0
- Rationale: a 0 value will ensure that that the multiply-add step does not affect the final value of the output element
- The condition tested for loading input elements is different from the test for calculating output P element
  - A thread that does not calculate valid P element can still participate in loading input tile elements

# Phase 1 Use for Block (0,0) (iteration 1)


$N_{0,0}$	$N_{0,1}$	$N_{0,2}$	
$N_{1,0}$	$N_{1,1}$	$N_{1,2}$	
$N_{2,0}$	$N_{2,1}$	$N_{2,2}$	

$M_{0,0}$	$M_{0,1}$	$M_{0,2}$	
$M_{1,0}$	$M_{1,1}$	$M_{1,2}$	
$M_{2,0}$	$M_{2,1}$	$M_{2,2}$	

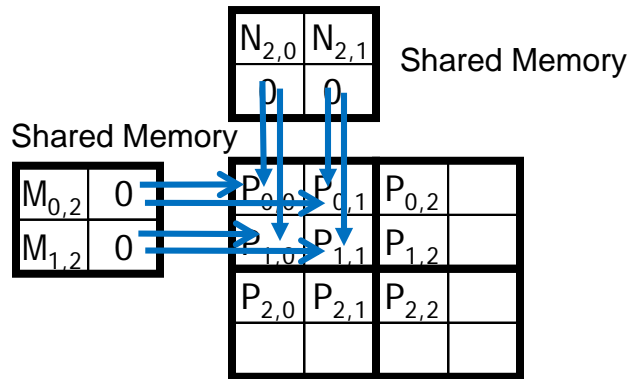


# Boundary Condition for Input M Tile

- Each thread loads
  - $M[\text{Row}][p \cdot \text{TILE\_WIDTH} + tx]$
  - $M[\text{Row} \cdot \text{Width} + p \cdot \text{TILE\_WIDTH} + tx]$
- Need to test
  - $(\text{Row} < \text{Width}) \ \&\& \ (p \cdot \text{TILE\_WIDTH} + tx < \text{Width})$
  - If true, load M element
  - Else , load 0

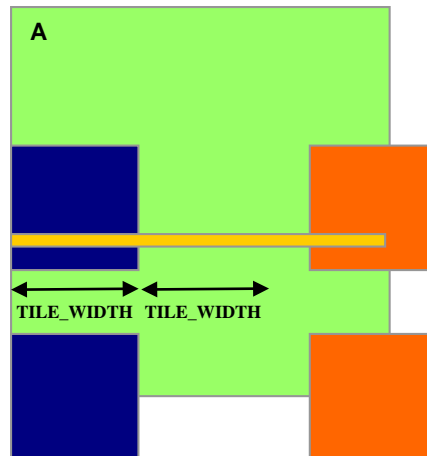

# Boundary Condition for Input N Tile

- Each thread loads
  - $N[p * \text{TILE\_WIDTH} + ty][\text{Col}]$
  - $N[(p * \text{TILE\_WIDTH} + ty) * \text{Width} + \text{Col}]$
- Need to test
  - $(p * \text{TILE\_WIDTH} + ty < \text{Width}) \ \&\& \ (\text{Col} < \text{Width})$
  - If true, load N element
  - Else , load 0

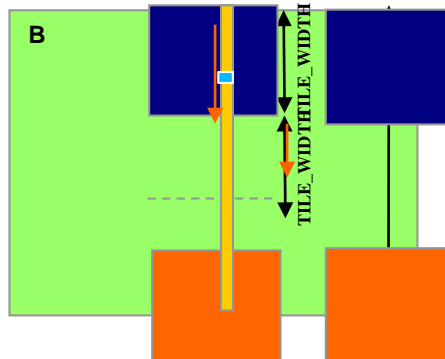

# Loading Elements – with boundary check

```
- 8  for (int p = 0; p < (Width-1) / TILE_WIDTH + 1; ++p) {  
-  
-  ++    if (Row < Width && t * TILE_WIDTH+tx < Width) {  
- 9      ds_M[ty][tx] = M[Row * Width + p * TILE_WIDTH + tx];  
-  ++    } else {  
-  ++      ds_M[ty][tx] = 0.0;  
-  ++    }  
-  ++    if (p*TILE_WIDTH+ty < Width && Col < Width) {  
- 10     ds_N[ty][tx] = N[(p*TILE_WIDTH + ty) * Width + Col];  
-  ++    } else {  
-  ++      ds_N[ty][tx] = 0.0;  
-  ++    }  
- 11    __syncthreads();  
-  
-
```

# Inner Product – Before and After

```
- ++ if(Row < Width && Col < Width) {  
- 12   for (int i = 0; i < TILE_WIDTH; ++i) {  
- 13       Pvalue += ds_M[ty][i] * ds_N[i][tx];  
-     }  
- 14   __syncthreads();  
- 15 } /* end of outer for loop */  
- ++ if (Row < Width && Col < Width)  
- 16     P[Row*Width + Col] = Pvalue;  
- } /* end of kernel */
```



# Some Important Points

- For each thread the conditions are different for
  - Loading M element
  - Loading N element
  - Calculating and storing output elements
- The effect of control divergence should be small for large matrices

# Handling General Rectangular Matrices

- In general, the matrix multiplication is defined in terms of rectangular matrices
  - A  $j \times k$  M matrix multiplied with a  $k \times l$  N matrix results in a  $j \times l$  P matrix
- We have presented square matrix multiplication, a special case
- The kernel function needs to be generalized to handle general rectangular matrices
  - The Width argument is replaced by three arguments:  $j, k, l$
  - When Width is used to refer to the height of M or height of P, replace it with  $j$
  - When Width is used to refer to the width of M or height of N, replace it with  $k$
  - When Width is used to refer to the width of N or width of P, replace it with  $l$



# GPU Teaching Kit

Accelerated Computing



The GPU Teaching Kit is licensed by NVIDIA and the University of Illinois under the [Creative Commons Attribution-NonCommercial 4.0 International License](https://creativecommons.org/licenses/by-nc/4.0/).